

HIGH BANDWIDTH, UNIQUELY VERSATILE



WaveMaster 8 Zi-B
4 GHz – 20 GHz Oscilloscopes

Most Capability




Best for Serial Data & DDR



Analyze the Whole Link at Once

The most complete feature set on a high-bandwidth oscilloscope

- Both 50 Ω and 1 M Ω inputs for widest probe support
- Mixed signal acquisition capability
- Comprehensive serial triggering and decoding

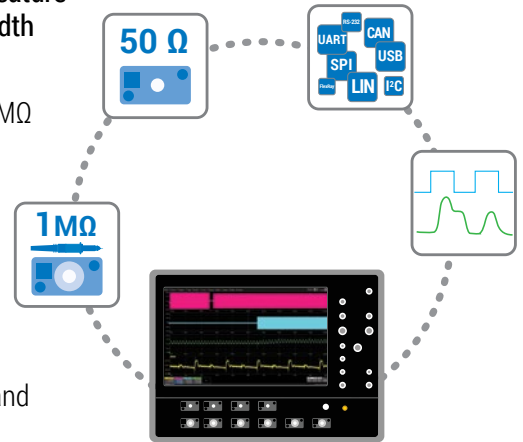


Unmatched high-speed serial tools


- Simple and powerful compliance test automation
- Interactive DDR Debug Toolkit
- Most complete eye diagram, jitter and noise analysis



End-to-end link signal integrity analysis

- Import S-parameter files from WavePulser 40iX and other instruments
- De-embed fixtures and emulate channels
- Measure transmitter and receiver equalization effects

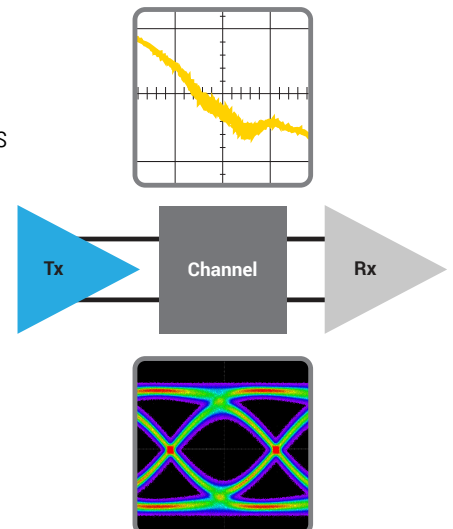

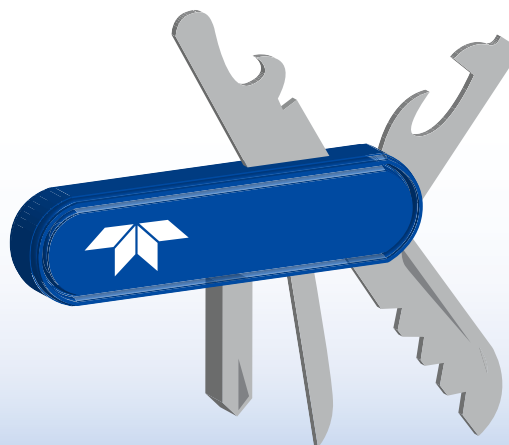


High Bandwidth, Uniquely Versatile



WaveMaster 8 Zi-B

HIGHEST CAPABILITY

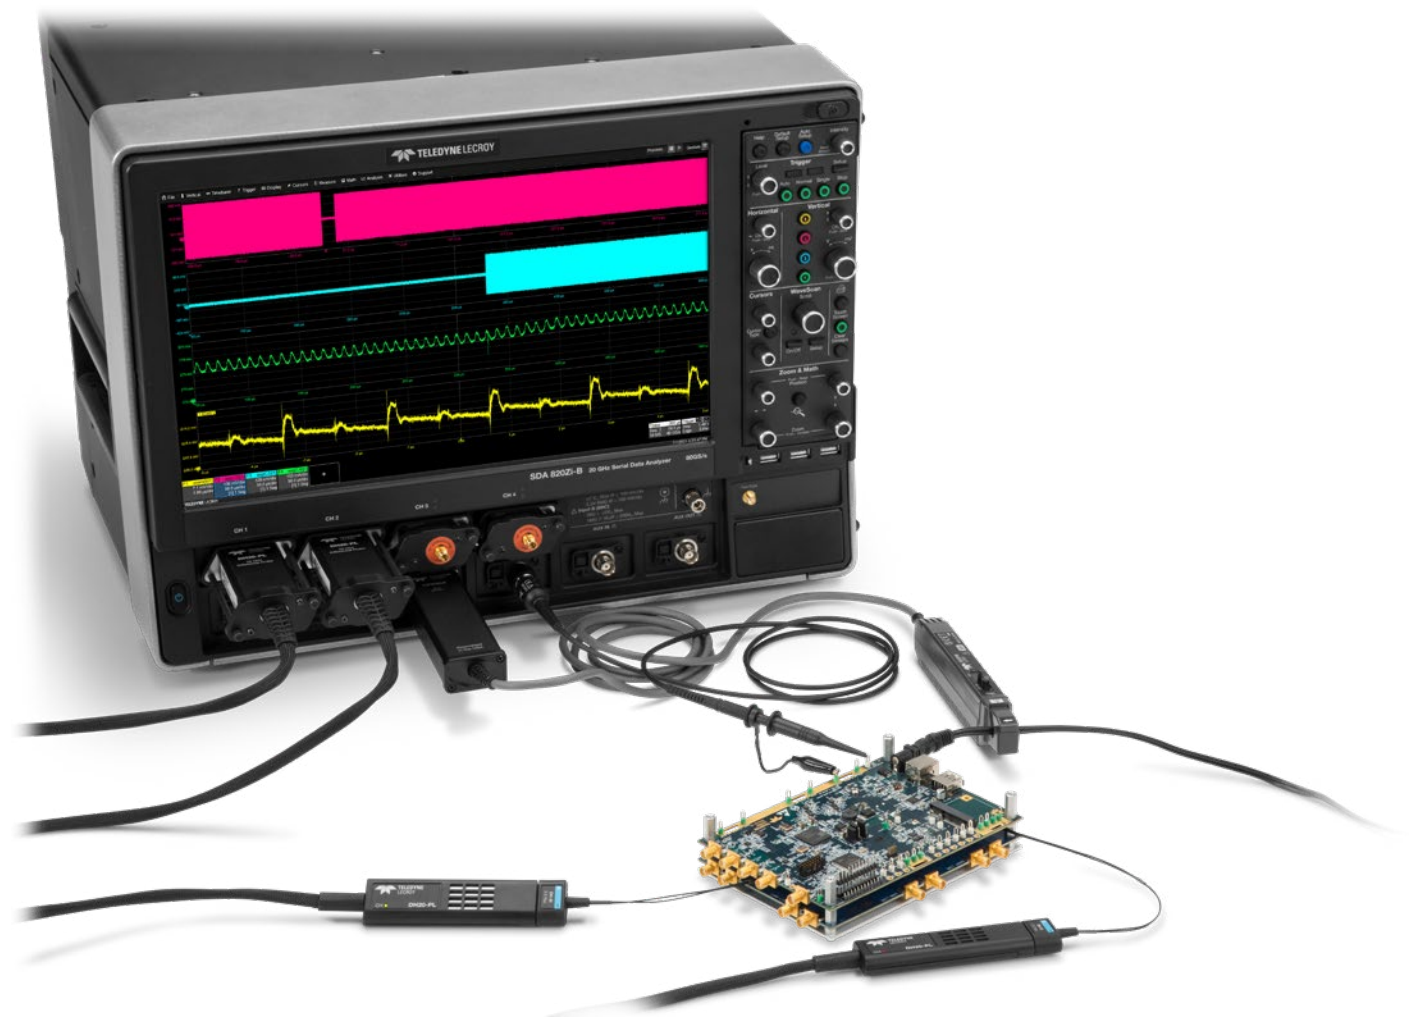

WaveMaster 8 Zi-B's unique combination of high-bandwidth performance (up to 20 GHz) and general purpose features enables the most comprehensive validation and debug capabilities. This one oscilloscope platform covers low-speed and high-speed embedded systems, serial data analysis, and DDR debug.

50 Ω and 1 M Ω Inputs for Widest Probe Support

WaveMaster is the only high-bandwidth oscilloscope to also provide built-in 1 M Ω inputs. This permits direct connection of passive probes, and support for the widest variety of low voltage, high voltage and current probes, all without requiring the use of expensive, add-on external adapters that reduce accuracy and go missing when you need them.

Low- and High-speed Mixed Signal Acquisition Capability


Expand your acquisition reach with mixed-signal options for low-speed digital acquisitions with up to 36 channels and 500 MHz digital clock rates or high-speed digital acquisitions with up to 18 channels and 6 Gb/s digital clock rates.

Comprehensive Low-speed Serial Data Triggers/Decoders

Comprehensive low-speed serial data triggers and decoders, plus measure/graph and eye diagram testing, provide the best causal analysis of low-speed events. Easily correlate low-speed serial interactions with high-speed serial data or other events.


BEST FOR SERIAL DATA AND DDR

The WaveMaster 8 Zi-B is the best oscilloscope platform for high-speed serial data and memory compliance and debug. The combination of general-purpose capabilities, mixed-signal options, low-speed serial triggers/decoders and comprehensive compliance, analysis and debug software options puts you in the drivers seat.

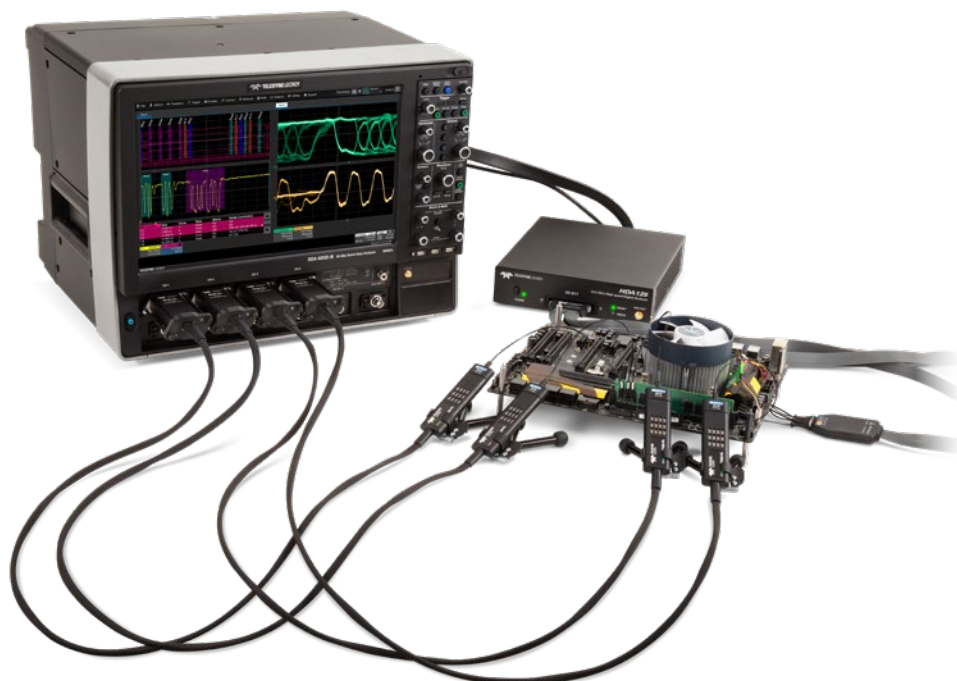

QualiPHY Automated Compliance Testing

- Support for PCI Express®, USB, HDMI™, DisplayPort™, Ethernet, Automotive Ethernet, DDR, and many other serial data standards
- Fully automated transmitter and receiver testing and receiver test calibration
- Step-by-step instructions and automatic report generation
- Automated pass/fail test reports

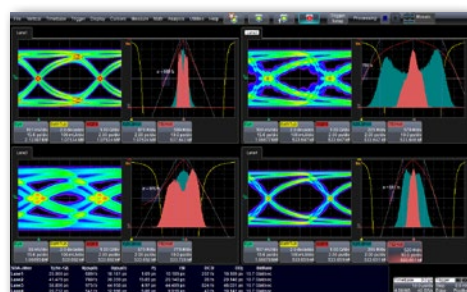

Most Complete Serial Data Analysis Toolset

- Multi-lane jitter and eye analysis
- LaneScape™ comparison modes
- Vertical noise and crosstalk analysis
- Integrated equalization, emulation and de-embedding
- Virtual probing





Comprehensive DDR Test Suite

- Support for DDR2/LPDDR2 through DDR5/LPDDR4X
- JEDEC physical layer compliance test
- Debug Toolkits provide fast problem solving during the DDR design and integration cycle
- HDA125 High-speed Digital Analyzer for flexible, mixed-signal probing
- Unmatched probing versatility up to 30 GHz

ANALYZE THE WHOLE LINK


Combining the WavePulser® 40iX High-speed Interconnect Analyzer, WaveMaster 8 Zi-B oscilloscope and SDAIII-CompleteLinQ option gives the most complete signal integrity analysis toolkit available. Quickly characterize the entire signal path from transmitter to receiver, acquire high-fidelity waveforms at a convenient test point, and then easily analyze the signal at any point of interest.

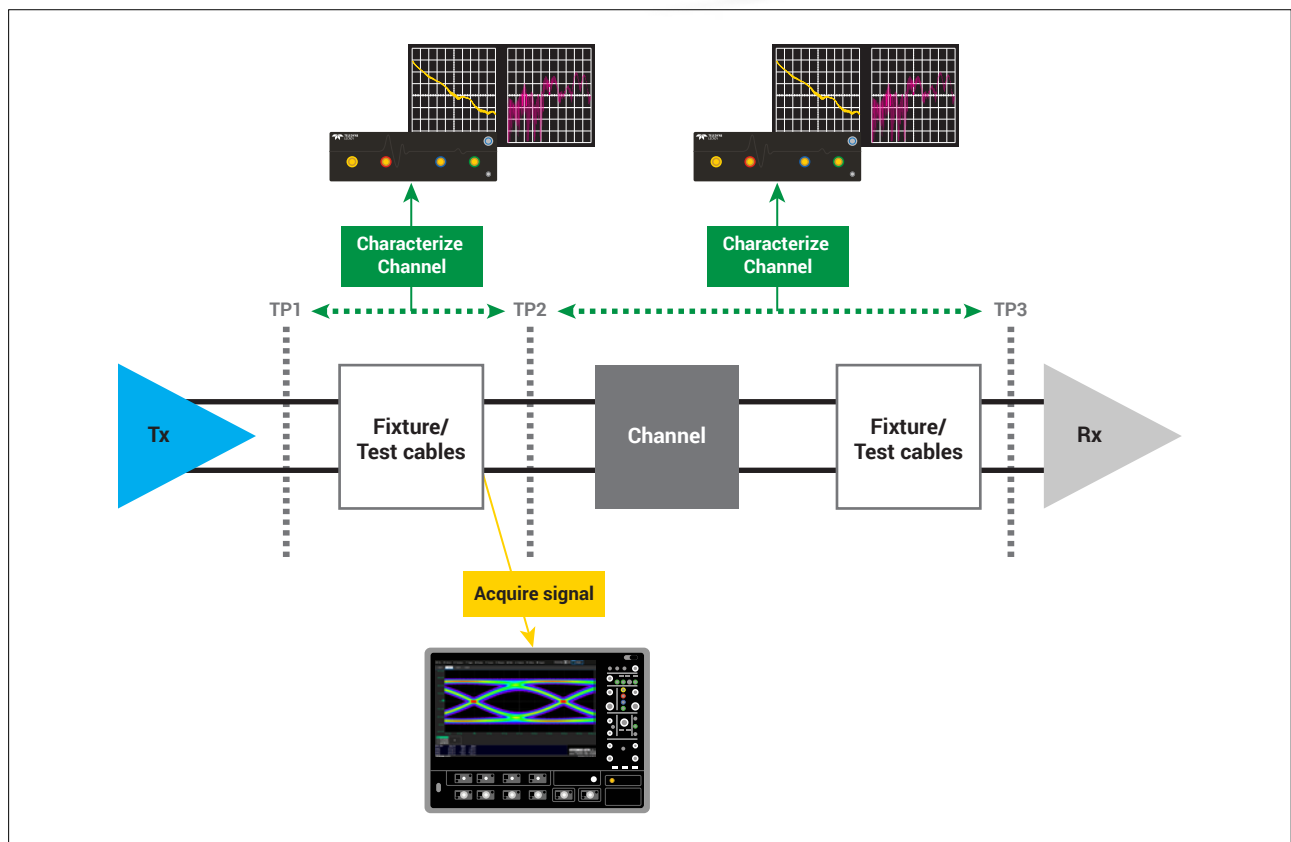

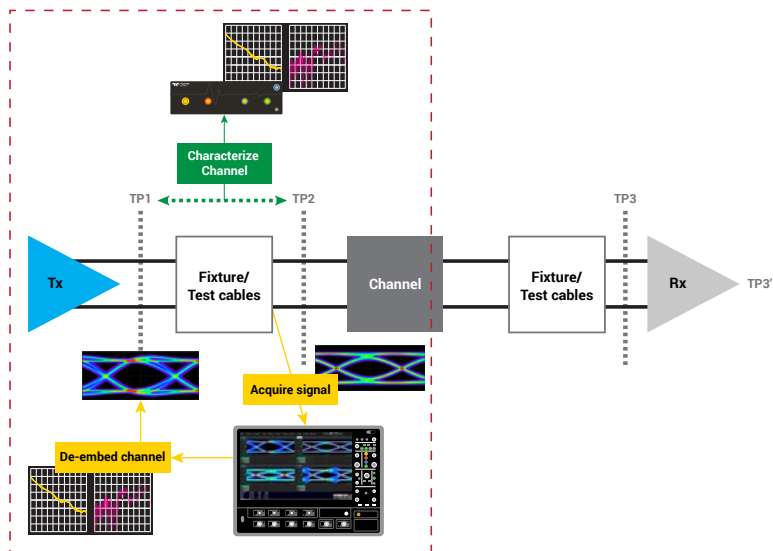


De-embed fixtures and test cables

- Measure S-parameter models using WavePulser 40iX, or import from other measurements or simulation tools
- Sophisticated Eye Doctor and VirtualProbe tools easily and accurately remove effects of fixtures and cables from acquired oscilloscope waveforms
- Apply the full SDAIII-CompleteLinQ toolkit to de-embedded waveforms for full eye, jitter and noise analysis directly at the output pins of the device under test

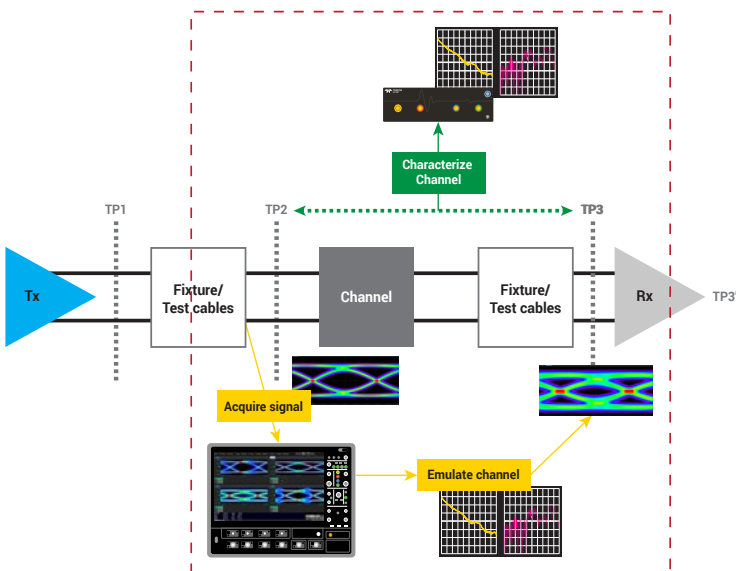

Emulate real-world channel losses

- WavePulser 40iX simplifies and speeds up accurate measurements of test channel loss profiles
- Channel model s-parameter files can be easily imported from the WavePulser 40iX or elsewhere into Eye Doctor and VirtualProbe tools in the oscilloscope
- Acquire waveforms at any point in the signal path, then use VirtualProbe to cleanly embed the effects of the channel
- Use the full analysis capability of SDAIII-CompleteLinQ to compare eye, jitter and noise measurements at multiple test points simultaneously

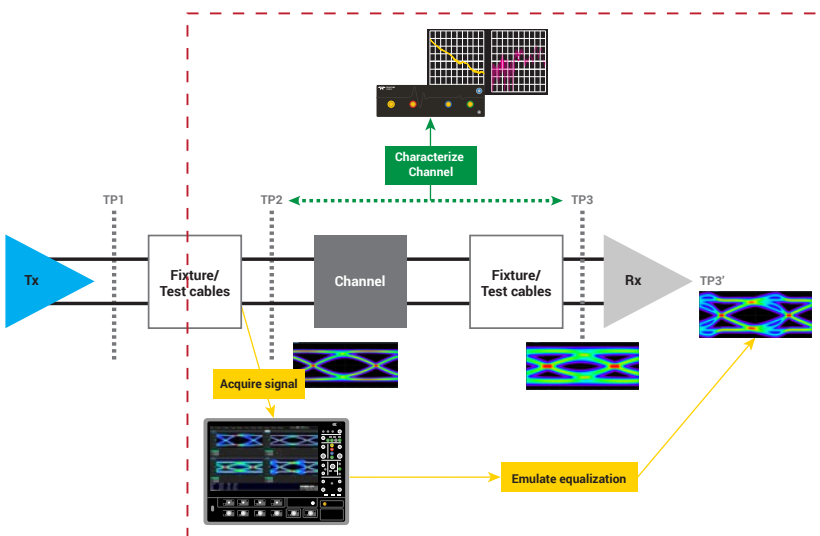


Emulate transmitter and receiver equalization

- SDAIII-CompleteLinQ with Eye Doctor enables the emulation of all common equalization types, including:
 - Transmitter emphasis
 - Receiver FFE
 - Receiver CTLE
 - Receiver DFE

SDAIII-COMPLETELINQ

The SDAIII software option provides the most comprehensive jitter decomposition, eye diagram and analysis tools with advanced signal integrity tools for emulation, de-embedding and equalization simulation.

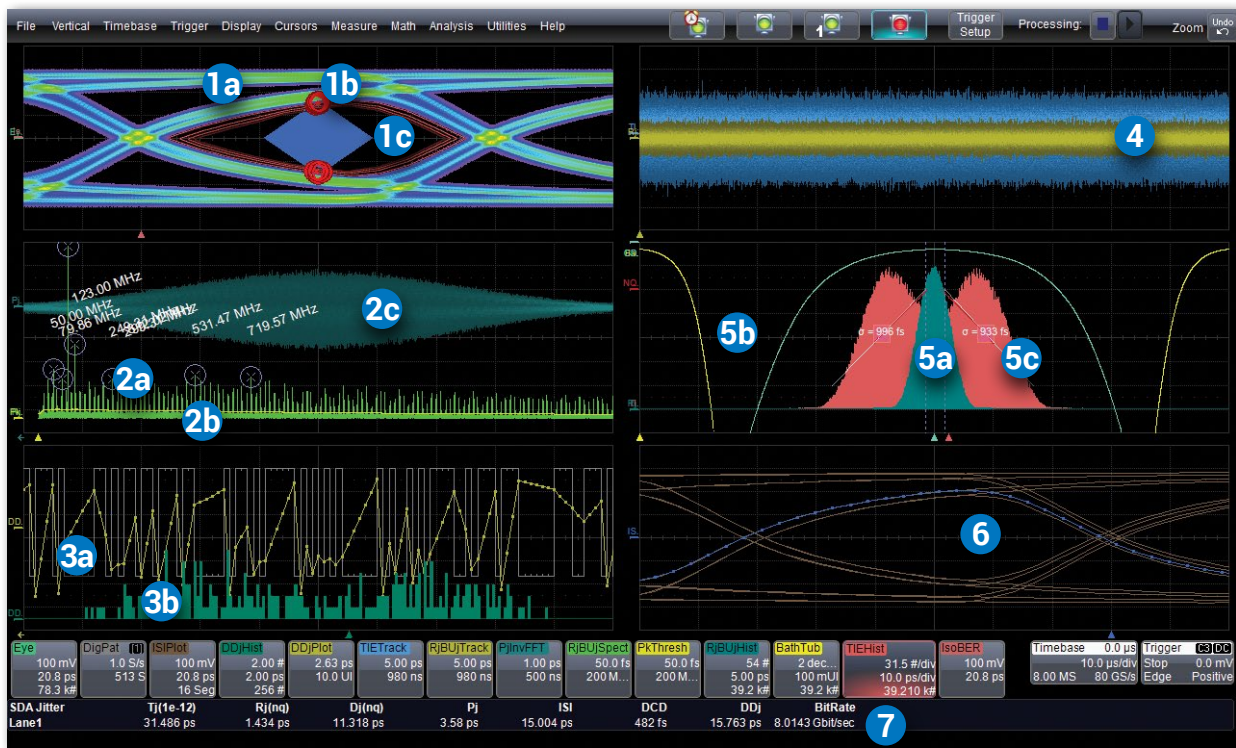


Key Attributes


1. Eye diagram (a), eye mask failure (b) and IsoBER eye opening analysis (c)
2. Jitter spectrum (a) with noise floor display (b) and inverse FFT of the periodic jitter (c)
3. Data dependent jitter (DDj) plot for each bit in synch with pattern (a) and with histogram (b)
4. Time interval error (TIE) jitter track analysis
5. Jitter histograms (a) with bathtub curves (b) and CDF plot (c)
6. Intersymbol interference (ISI) plots pinpoint bit sequences that have high ISI and are sources of bit errors
7. Jitter measurements table with full details for one or more "lanes" plus reference

Advanced Signal Integrity Tools

Complete set of tools for: channel emulation; fixture, cable or channel de-embedding/embedding; adding or removing emphasis; performing CTLE, FFE or DFE equalization.

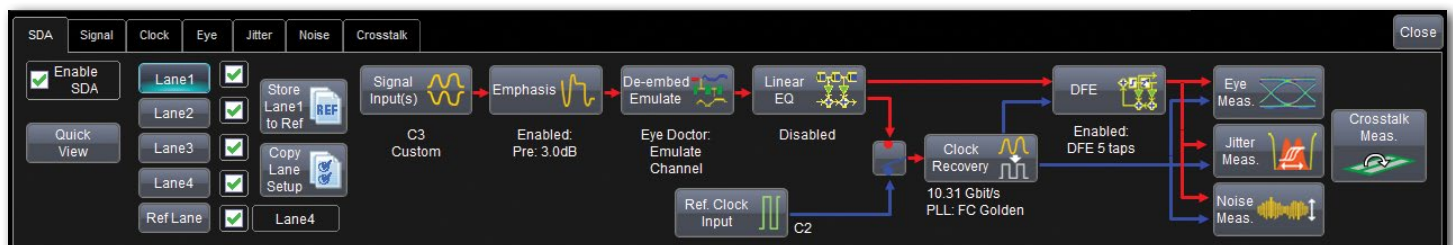

COMPREHENSIVE SERIAL DATA ANALYSIS

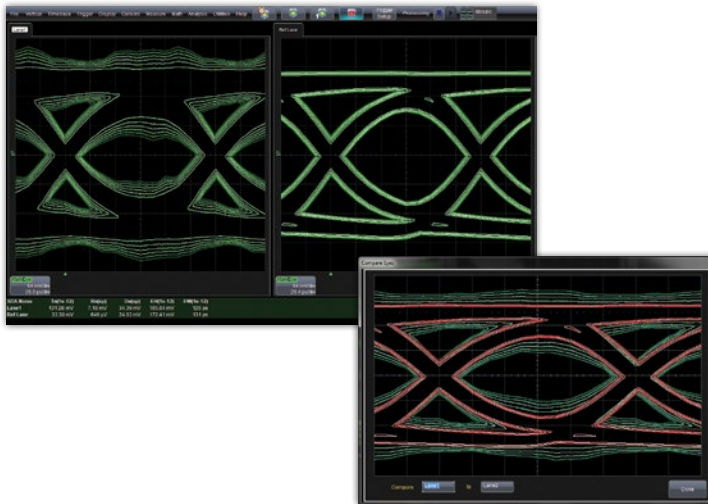


Use the unique crosstalk eye to view and compare noise in a way that cannot be done with a traditional eye diagram.

Fast Single or Multiple Eye Diagrams

- Up to four real-time and one reference comparison eye diagram, NRZ or PAM
- Single lane with multiple-point or multi-configuration analysis
- Analyze multiple lanes simultaneously
- Fast eye diagram creation
- Reference lane simplifies multi-scenario testing
- IsoBER displays expected eye infringement to a user-settable bit error rate (BER)
- Crosstalk eye contour plots display the impact of excessive noise

Comprehensive Jitter Decomposition & Analysis


- Complete Tj, Rj and Dj decomposition numerics on up to four lanes/configurations plus a reference
- Three different jitter decomposition models
- Complete random (Rj) and non-data dependent jitter (Rj+BUj) parameters and views
- Comprehensive data dependent jitter (DDj) analysis, including DDj plots and histograms, digital pattern display, and ISI plot by pattern
- Periodic jitter (Pj) inverse FFT
- Other jitter parameters including bounded uncorrelated jitter (BUj) and odd-even jitter (OEj)

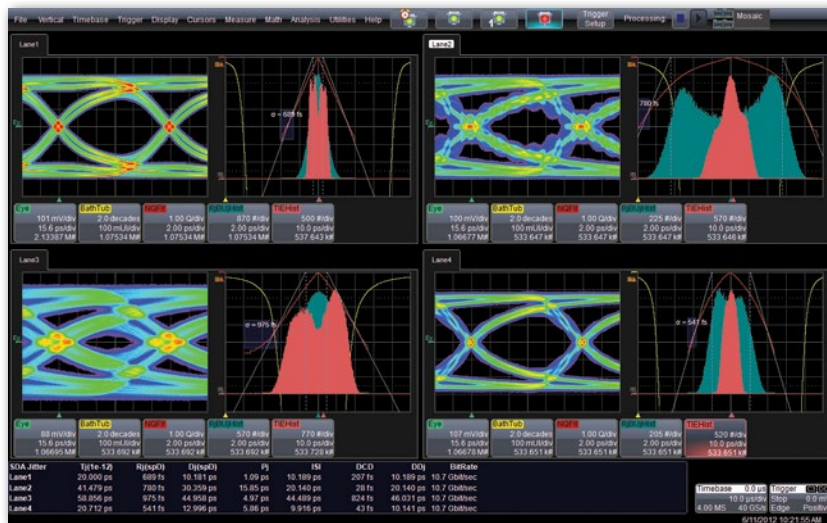

A comprehensive set of jitter measurements, extrapolations and decompositions, with associated views for complete understanding, provides the best capability to debug problems faster.

Vertical Noise & Crosstalk Analysis


- Tools for complete aggressor/victim analysis
- Measure, extrapolate and decompose vertical noise just as you do with (horizontal) jitter
- Noise tracks, histograms and spectrums providing deep insight into noise sources
- Crosstalk eye contour plot shows probabilistic extent of noise, both inside and outside the eye

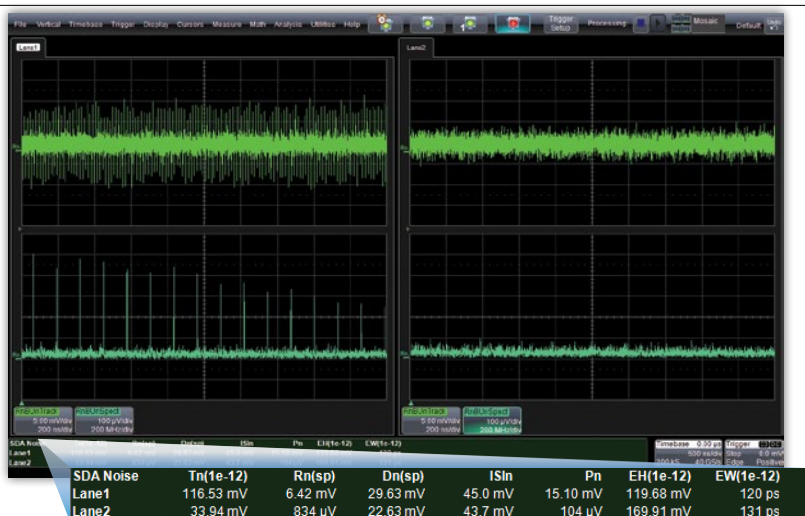

View noise measurements in both time and frequency domains for insight into sources of crosstalk leading to bit errors.

COMPREHENSIVE DDR TEST SUITE

Teledyne LeCroy offers a full line of DDR test solutions for system bring-up, debug, performance analysis and compliance. Teledyne LeCroy's DDR test suite combines the right tools for every stage of development.

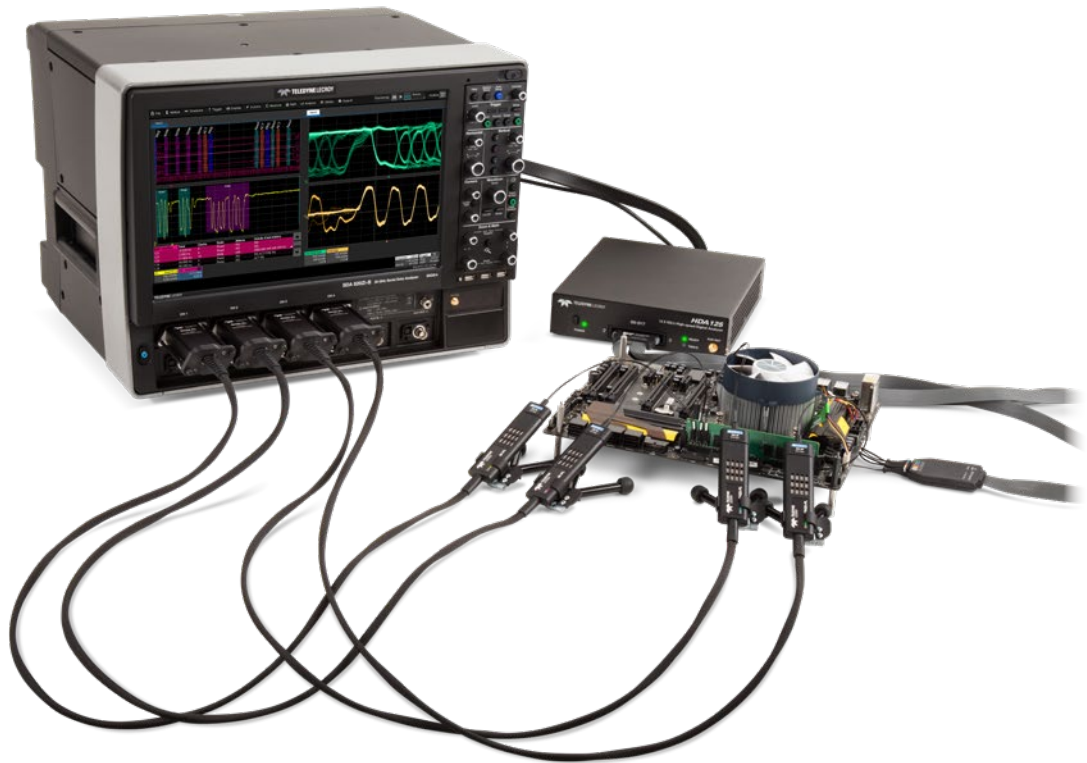


Physical Layer DDR Toolkit

The DDR Debug Toolkit provides test, debug and analysis tools for the entire DDR cycle. All DDR analysis can be performed simultaneously over four different measurement views.



Physical Layer Compliance

The QualiPHY DDR packages perform all clock, electrical and timing tests to conform to the JEDEC specification. Supports all versions of DDR/LPDDR.

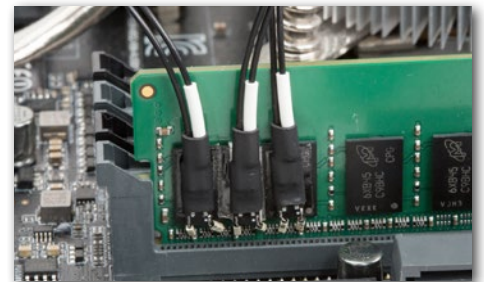

Unmatched Probing Versatility


The HDA125 High-speed Digital Analyzer provides the highest-performance (18 digital inputs, up to 12.5 GS/s), most flexible mixed-signal solution for DDR debug and evaluation. Analog differential probes provide up to 20 GHz bandwidth. QuickLink probe tips work with both the HDA125 and analog probes.

COMPREHENSIVE DDR TEST SUITE



Effortless Burst Separation

- Automatic separation of Read and Write bursts eliminates time-consuming manual burst identification
- Separate bursts based on DQ-DQS skew or based on the command bus (when used with the HDA125)
- Bursted data jitter analysis
- Built-in DDR-specific measurements

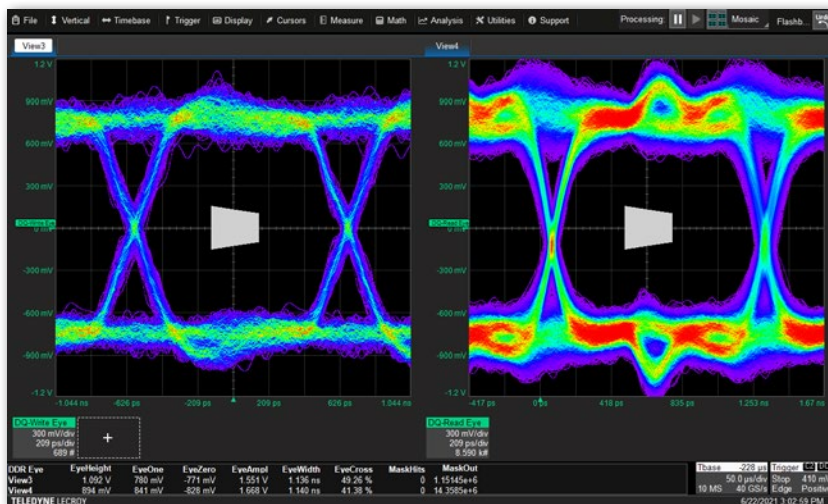

Eye Diagram Analysis

- Up to 10 simultaneous eye diagrams
- Standard or custom-defined pass/fail masks
- Mask violation indicators automatically identify and locate specific unit intervals where mask violations occurred
- Built-in measurements for eye height, eye width and eye opening provide quantitative understanding of system performance
- Compare performance across multiple testing views with simultaneous eye diagrams




Enhanced Debug Capability with the HDA125

- Command bus digital acquisition capabilities
- Full DDR interface visibility simplifies transition from validation to debug
- Trigger on specific states of the command bus
- Command bus activity is tabulated and time-correlated with the color-coded and labeled physical layer waveforms

COMPLETE PCI EXPRESS® ELECTRICAL TEST SOLUTIONS


Teledyne LeCroy's PCI Express electrical test solutions combine superior instruments with sophisticated jitter, eye diagram, debug and compliance software for all versions of PCI Express.

- Automated Transmitter, Receiver and Link Equalization (LEQ) testing with QualiPHY software options
- Visibility from physical layer through protocol operations
- WaveMaster/SDA 8 Zi-B is gold suite certified for all relevant PCI Express 3.0 (8 GT/s) tests

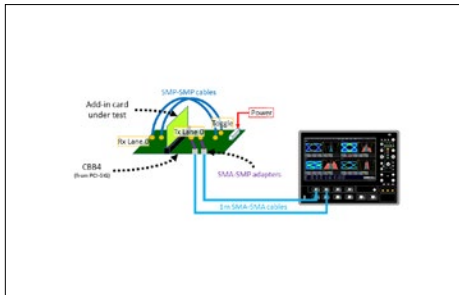


Transmitter (Tx) Testing

- Base specification and compliance testing for add-in cards and systems in CEM, M.2 and U.2 form factors
- QualiPHY fully automates collection and processing of transmitter waveforms
- Supports TF-PCIE4-CTRL controller for full fixture and DUT automation
- Debug electrical compliance issues faster with SDAIII-CompletelinQ software

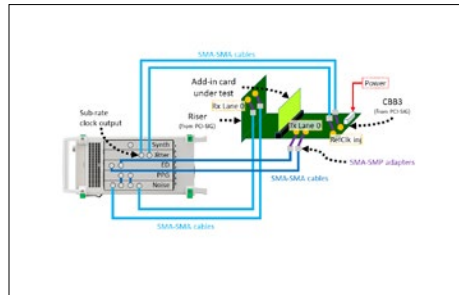


Receiver (Rx) Testing

- Receiver calibration and testing using the WaveMaster and Anritsu MP1900A BERT
- QualiPHY controls both the WaveMaster and MP1900A
- Use WavePulser 40iX for receiver channel characterization and calibration
- Single QualiPHY user interface for Tx and Rx testing

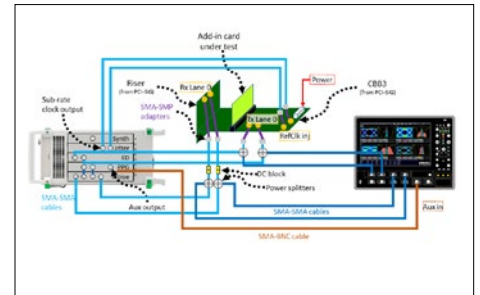


Link Equalization (LEQ) Testing

- Fully automated Tx and Rx LEQ testing using QualiPHY with SigTest integration
- Test, fixture and DUT automation for fast throughput without lots of manual steps
- Go directly from compliance test to cross-layer debug using ProtoSync on the WaveMaster and LTSSM analysis on the MP1900A

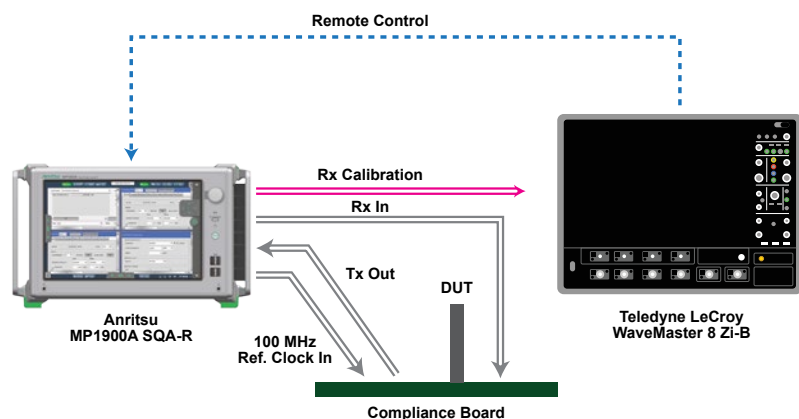

Superior PCIe® Test Solutions

- Approved PCI-SIG gold suite solution for PCIe electrical compliance test programs
- High accuracy and repeatability due to superior signal quality
- Fastest receiver test calibration
- Complete DUT and fixture automation

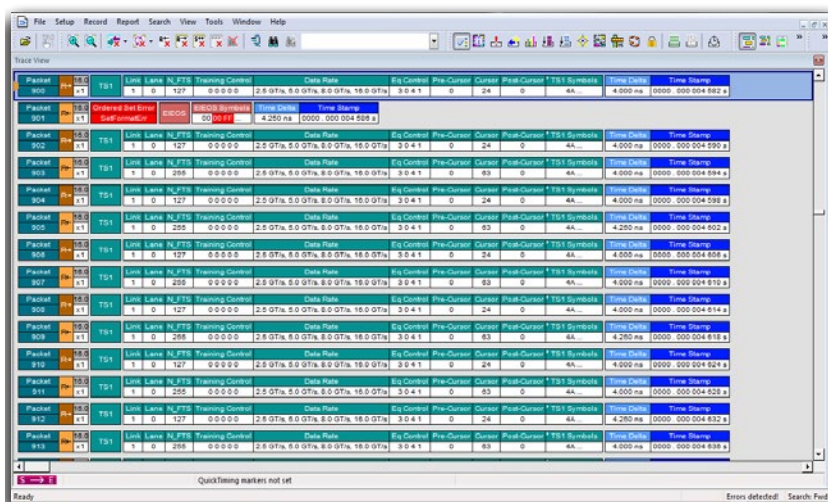

Visibility from Physical Layer Through Protocol Operations


- LTSSM logging and state-machine triggering
- ProtoSync integrates industry-standard protocol display and physical-layer analysis
- Go directly from Link Equalization compliance tests to deep debug

Looking for PCIe 4.0, 5.0, or 6.0?

- LabMaster 10 Zi-A oscilloscope supports electrical Tx and Rx compliance test solutions for PCIe 5.0, 4.0, 3.0 and below
- PAM4 analysis capability for future PCIe 6.0 technology and beyond
- ProtoSync protocol analysis software provides a view of the complete protocol stack, from physical layer to transaction layer



Interoperability issues can lead to finger-pointing exercises that cost money and time-to-market. Teledyne LeCroy CrossSync PHY software and interposers merge the functions of your Teledyne LeCroy PCI Express protocol analyzer and oscilloscope - giving insight into link behavior that no other instrument can provide.

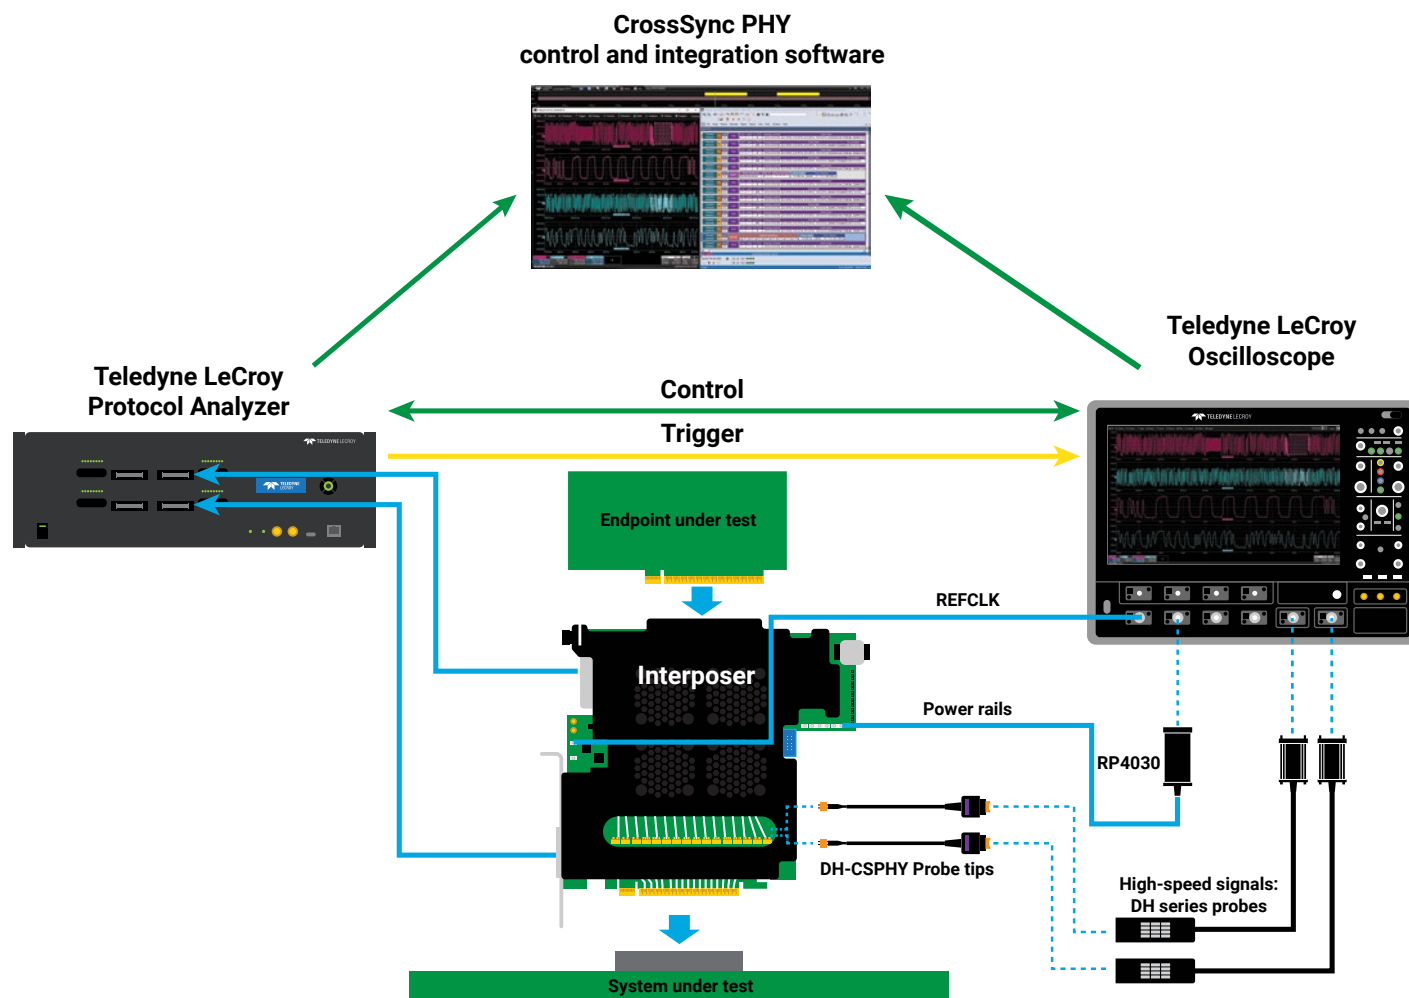

Validate and debug active link operation

- CrossSync PHY capable interposers enable observation of both electrical and protocol behavior without disturbing the link
- Sideband signals, reference clock and power rails are all easily accessible to oscilloscope probes
- Optional high-bandwidth oscilloscope probing points for PCI Express data lanes

Quickly resolve interoperability issues by capturing the entire protocol stack

- Trigger protocol analyzer and oscilloscope captures on the same high-level event
- Easily measure timing relationships between protocol and electrical domains
- Faster root-cause analysis means fewer costly finger-pointing exercises

Analyze link training with integrated physical and protocol views

- Observe electrical-level results of protocol-level commands
- Combined navigation means always knowing which protocol and electrical behaviors happen at the same time
- No single instrument can deliver this level of cross-layer insight into link training behavior

The CrossSync PHY software option for your Teledyne LeCroy oscilloscope enables precise, intuitive navigation between time-correlated protocol analyzer and oscilloscope traces.

Oscilloscope timebase and protocol analyzer acquisition window remain synchronized while navigating through the combined acquisition, for total confidence in timing behavior.



CrossSync PHY capability enhances Teledyne LeCroy's industry-leading set of PCI Express protocol analysis interposers by adding high-fidelity oscilloscope probing points with simple and convenient signal access.

Easily probe and observe:

- High-speed data signals
- Reference clock behavior
- Power rail voltage and current
- Sideband signals



PCI Express 4.0 x4 M.2 M-Key Interposer






PCI Express 5.0 CEM x16 Interposer

USB AND USB TYPE-C® ELECTRICAL TEST SOLUTIONS

In 2011, Teledyne LeCroy became the first USB-IF approved “Gold Suite” for USB 3.0 at 5 Gb/s. Today, the USB Type-C connector carries multiple lanes each up to 40 Gb/s data supporting USB4® Version 2.0, USB4, USB 3.2, Thunderbolt™ 3/4 and DisplayPort™ 2 standards. Teledyne LeCroy continues to be the trusted leader with:

- USB-IF approved “Gold Suite” PHY Tx/Rx compliance testing
- VESA approved DisplayPort over USB Type-C compliance testing
- Up to 4 lanes (8 channels) of simultaneous acquisition
- The deepest signal integrity toolbox
- Unmatched PHY-logic and USB Type-C sideband debug

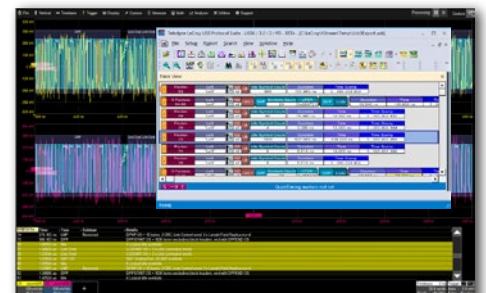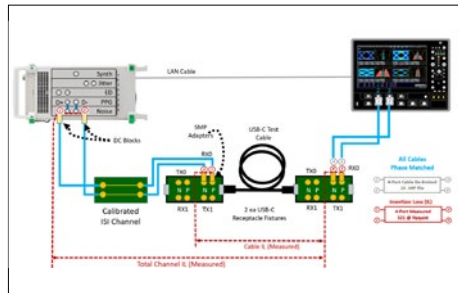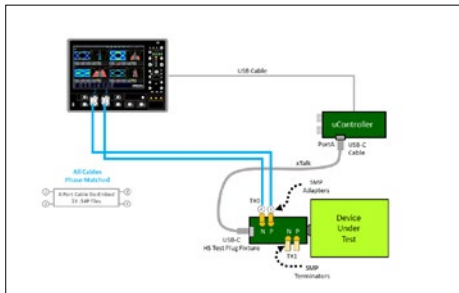

Fastest PHY Compliance


- QualiPHY software automates all USB-C standard Transmitter (Tx) and Receiver (Rx) compliance tests using a single, friendly user interface
- Accurate, repeatable Rx testing with Anritsu MP1900A BERT
- Support for both USB-IF and 3rd party fixtures and software tools
- Single QualiPHY user interface for Tx and Rx testing

Deepest SI Toolbox

- Choose either USB-IF SigTest or Teledyne LeCroy SDAIII analysis methodology
- Debug electrical compliance issues faster with SDAIII-CompleteLinQ eye diagrams, jitter and noise analysis software
- WavePulser 40iX simplifies and speeds up receiver channel characterization and calibration


PHY-logic & Sideband Debug

- See the whole link with CrossSync PHY for USB4 and Thunderbolt
- USB4 and USB 3.2/2.0 serial decode options provide decode of USB packets with graphical, intuitive, color-coded decode overlays
- ProtoSync integrates industry-standard protocol display
- USB-PD (Power Delivery) TDMF and DisplayPort-AUX DMP provide unmatched visibility of USB Type-C sideband signals for system debug

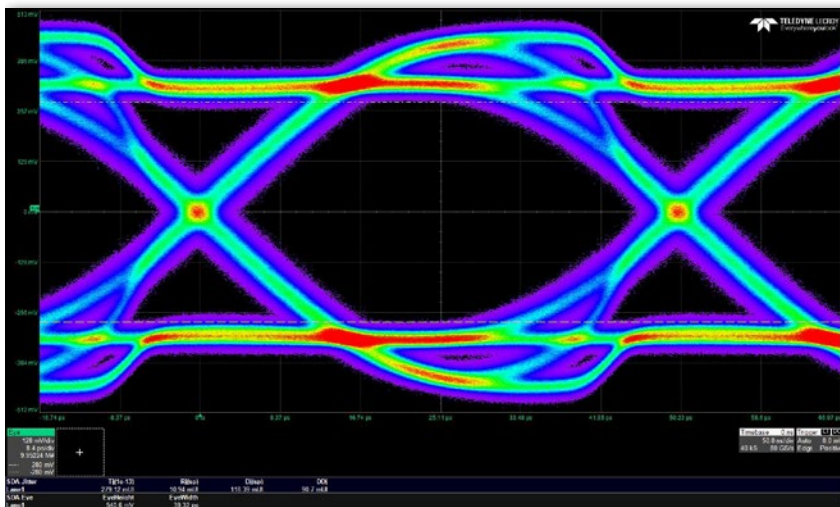

USB4 and Thunderbolt 3/4

- QPHY-USB4-TX-RX provides automated transmitter compliance test automation per the USB4 Gen2 (10 Gb/s NRZ), Gen3 (20 Gb/s NRZ) and Thunderbolt Gen2 (10.3125 Gb/s NRZ) and Gen3 (20.625 Gb/s NRZ) electrical Compliance Test Specifications (CTS)
- Integrates USB4 ETT for DUT control with the Wilder-Tech USB4 test controller, and Thunderbolt electrical scripts with Thunderbolt 3 controllers
- Fully automates receiver calibration and test with the Anritsu MP1900A high-speed BERT

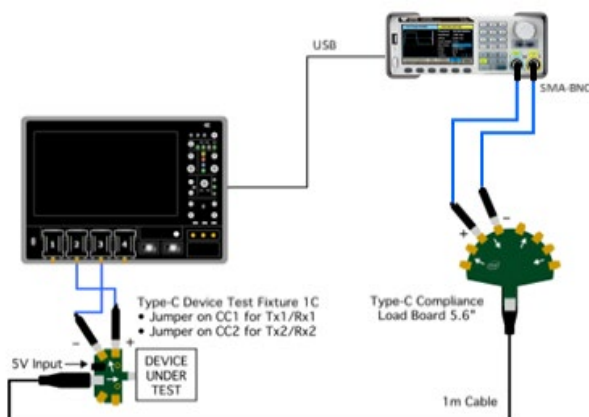

USB 3.2


- QPHY-USB3.2-TX-RX fully automates the USB 3.2 Tx and Rx CTS for Gen1 (5 Gb/s) and Gen2 (10 Gb/s), LFPS Tx/Rx and SCD/LBPM tests
- Supports a variety of generators for Tx compliance pattern control including Teledyne Test Tools AFG, Wilder-Tech USB Type-C controllers and Anritsu MP1900A BERT
- Fully automates Rx calibration and test with the Anritsu MP1900A high-speed BERT solution



DisplayPort over USB Type-C

- QPHY-DP2-SOURCE software automates source (Tx) testing for all DisplayPort 2 (UHBR20, UHBR13, UHBR10) and 1.4a (HBR3, HBR2, HBR, RBR) data rates up to four lanes
- QPHY-DP2-SINK software automates DisplayPort 2 and 1.4a sink (Rx) calibration and testing with the Anritsu MP1900A high-speed BERT solution
- DPAUX DMP provides AUX channel decode, serial data measurements and physical layer measurements
- Supports all VESA approved test fixtures including Standard/Enhanced DP, mDP and USB Type-C

Interoperability issues can lead to finger-pointing exercises that cost money and time-to-market. Teledyne LeCroy CrossSync PHY software merges the functions of your Teledyne LeCroy protocol analyzer and oscilloscope - giving insight into link behavior that no other instrument can provide.

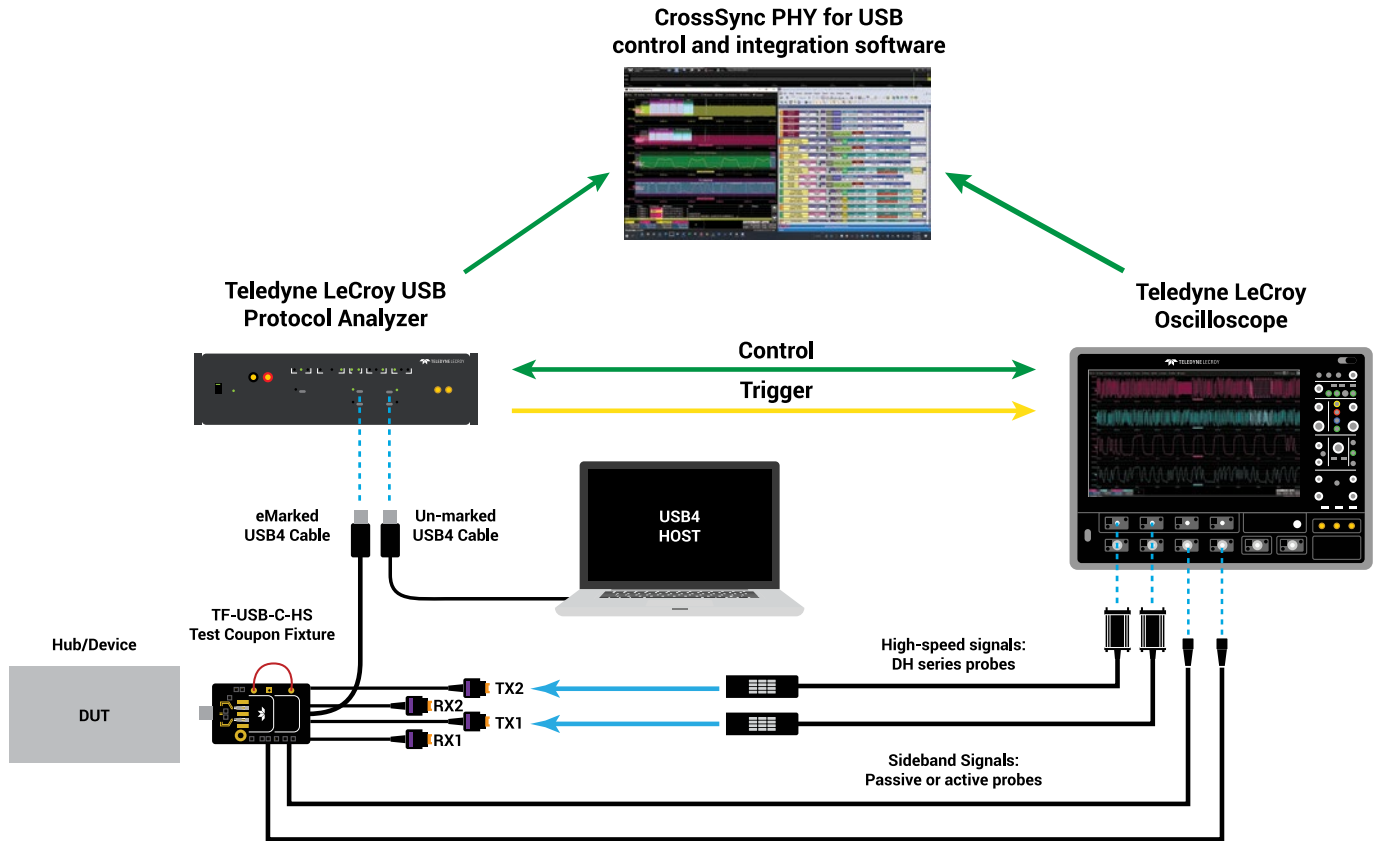

Validate and debug active link operation

- TF-USB-C-HS Test Coupon Fixtures enable observation of both electrical and protocol behavior without disturbing the link
- USB Type-C Sideband signals are all accessible using passive or active probes
- High-bandwidth oscilloscope probing points for USB data lanes

Quickly resolve interoperability issues by capturing the entire protocol stack

- Trigger protocol analyzer and oscilloscope captures on the same high-level event
- Easily measure timing relationships between protocol and electrical domains
- Faster root-cause analysis means fewer costly finger-pointing exercises

Analyze link training with integrated physical and protocol views


- Observe electrical-level results of protocol-level commands
- Combined navigation means always knowing which protocol and electrical behaviors happen at the same time
- No other solution can deliver this level of cross-layer insight into link training

The CrossSync PHY software option for your Teledyne LeCroy oscilloscope enables precise, intuitive navigation between time-correlated protocol analyzer and oscilloscope traces.

Oscilloscope timebase and protocol analyzer acquisition window remain synchronized while navigating through the combined acquisition, for total confidence in timing behavior.




CrossSync PHY capability enhances Teledyne LeCroy's industry-leading Protocol Analyzer/Exercisers by adding high-fidelity oscilloscope probing points with simple and convenient signal access using USB Type-C Test Coupon Fixtures.

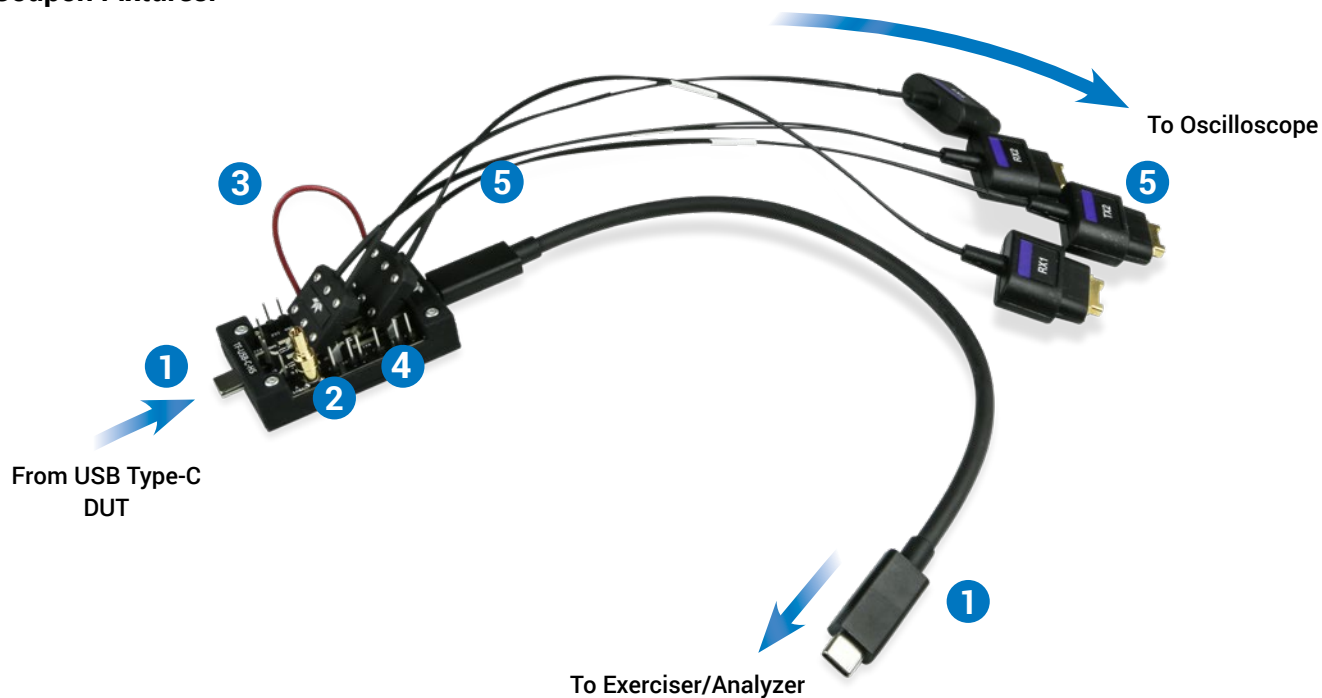

1. Transparent signal path through the test coupon fixture's USB-C Plug, Receptacle, and included 0.3 meter USB Type-C cable
2. Vbus access using Active Single Ended or Voltage Rail Probe
3. Current loop for measuring Vbus current through the test coupon fixture
4. Access SBU1/SBU2 (USB4 Sidebands and DP-AUX), CC1/CC2 (Power Delivery), and D+/D- (USB1.1/2.0) signals using square pins
5. High-speed TX1/TX2 and RX1/RX2 signals captured using a permanently attached DH-SI Series probe tips

QUALIPHY AUTOMATED SOFTWARE TEST FRAMEWORK


QualiPHY is Teledyne LeCroy's automated test framework for performing standardized tests on high-speed serial interfaces. QualiPHY automation is available for PCI Express, USB, DDR, DisplayPort, HDMI and other technologies - for a full list, see our **Oscilloscope Features, Options, and Accessories** catalog.

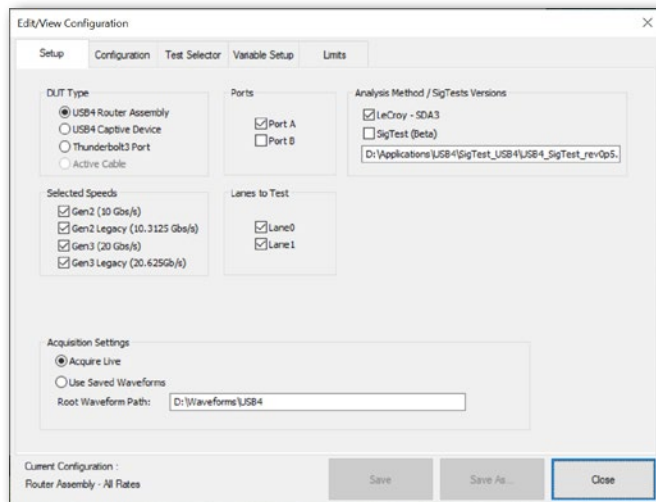

Simplified Setup

QualiPHY dialogs help the user configure all aspects of test execution, including:


- Selecting the set of tests to run
- Configuring test parameters
- Customizing limits
- Options to stop after each test or execute sequentially

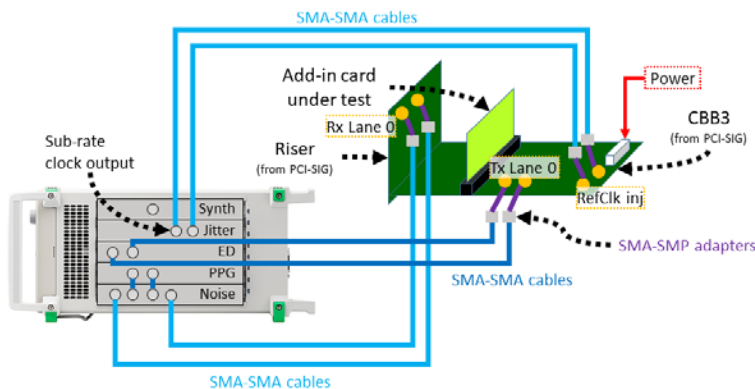

Streamlined Test Execution

QualiPHY guides the user through connection and execution of each test, resulting in increased repeatability.

- Clear, informative connection diagrams help simplify complex test setups and reduce mistakes
- Dialogs explain test execution and required Device Under Test (DUT) settings
- Simple, powerful Host Program Control interface enables complete automation of QualiPHY with external scripting environments (for selected QualiPHY products)

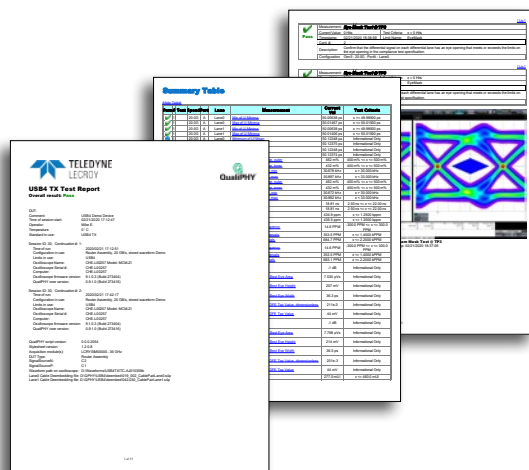


Informative Reporting

QualiPHY produces comprehensive reports documenting test results.

- Save reports in PDF or HTML format
- Screenshots and tabular results included
- Summary table at the start of the report makes it easy to tell pass/fail results at a glance

COMPREHENSIVE LOW-SPEED SERIAL SOLUTIONS

Teledyne LeCroy's Trigger (T), Decode (D), Measure (M) or Graph (G), and Eye Diagram (E) and Physical Layer (P) options are the best of their kind. Visit teledynelecroy.com/tdme for complete details.

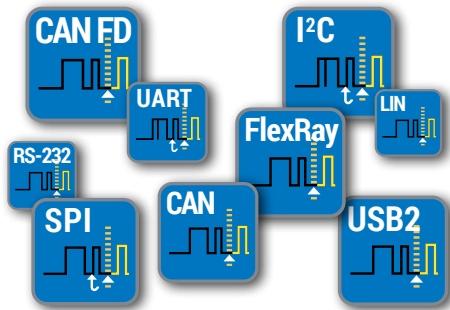

Highest Performance Triggers

Designed by people who know the standards, with the unique capabilities you need to isolate unusual events.

- Powerful, flexible, unique
- Conditional data setup
- Support for proprietary protocols



The Most Intuitive Serial Decoder

Decoded protocol information is color-coded and transparently overlaid for an intuitive, easy-to-understand visual record with a single time-interleaved table with touch to zoom.


- Intuitive, color-coded overlays
- Pattern search
- Interactive table summarizes results



Measure and Graph Tools for Validation Efficiency

Automated timing measurements quickly validate cause and effect and serial data digital-to-analog (DAC) converter enhances understanding.

- Automated timing measurements
- Serial data DAC and graphing tools
- Bus status measurements

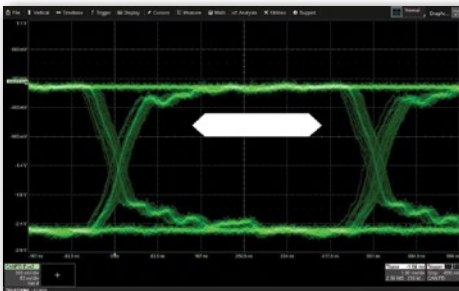

Eye Diagrams and Physical Layer Testing

Rapidly display an eye diagram of low-speed serial data signals. Eye parameters quantify system performance, and eye masks identify anomalies.

- Up to 4 simultaneous eye diagrams
- Eye measurements and masks
- Advanced PHY measurements

HIGH BANDWIDTH DIFFERENTIAL PROBES

The DH series of 8 to 30 GHz active differential probes provides high input dynamic range, large offset capability, low loading and excellent signal fidelity with a range of connection options.

General Purpose Probing up to 30 GHz

Teledyne LeCroy's DH series of 8 GHz to 30 GHz differential probes offer the combination of bandwidth, input range and offset capability to address any high-speed probing requirement - from debugging serial data interfaces to validating DDR memory systems.

Exceptional Signal Fidelity

DH series probes provide superior loading characteristics and are calibrated with a custom "fine-tuned" frequency response. The ultra-low loading and flat frequency response ensure accurate measurements.

Wide Variety of Tips

Two 30 GHz solder-in leads let you choose between a 3.5 Vpp input range for general-purpose applications, or high sensitivity with exceptionally low noise. Also available are a 1-meter long 16 GHz high-temperature tip, a 16 GHz handheld browser tip and an 8 GHz QuickLink adapter for connecting mixed-signal probe tips.



Tip Identification

Each DH series tip has its own data onboard - the oscilloscope software automatically selects the correct tip type and precisely corrects for its effects. The result is superior signal fidelity and superior ease-of-use.

Digital Logic Probing Options

HDA125 High-speed Digital Analyzer

The HDA125 turns your Teledyne LeCroy oscilloscope into the highest-performance, most flexible mixed-signal solution with 12.5 GS/s digital sampling rate (3 GHz digital clock rate) on 18 input channels and the QuickLink probing solution. Ideal for validation of DDR interfaces.



MS-500-36 Mixed Signal Oscilloscope Option

The MS-500-36 adds up to 36 digital channels for acquisition of digital signals at up to a 500 MHz clock rate (2 GS/s digital sample rate) with up to 50 Mpts/Ch for complete mixed-signal acquisition capability.



BROAD RANGE OF PROBING SOLUTIONS

WaveMaster 8 Zi-B oscilloscopes support a broad range of probes for a variety of applications.

Differential Probes (200 MHz – 1.5 GHz)



Wide dynamic range, low loading and excellent noise performance. From 200 MHz to 1.5 GHz. Specialty AP033 provides 10x gain and high CMRR.

Differential Probes (4 – 6 GHz)



5 Vp-p dynamic range with ± 3 V offset and low noise and loading. Solder-in, browser, QuickLink, Quick Connect, square pin and HiTemp leads/tips.

Differential Probes (8 – 30 GHz)



For serial data, DDR or other high-speed signals. Standard and high-sensitivity solder-in, HiTemp, and QuickLink for mixed-signal probing.

60 V Common Mode Differential Probes



The ideal probes for lower voltage GaN power conversion measurement with the highest accuracy, best CMRR and lowest noise. Up to 1 GHz.

High Voltage Differential Probes



1 kV, 2 kV and 6 kV CAT safety rated models. Widest differential voltage ranges, exceptional CMRR, low noise, 1% gain accuracy.

High Voltage Fiber Optically-isolated Probes



Measures small signals floating on an HV bus. Highest CMRR, low DUT loading with optical isolation.

High Voltage Passive Probes



1 kV to 6 kV ratings. Provides ground-referenced high voltage measurements in a wide range of applications.

Active Voltage Probes



1 to 4 GHz models. High signal fidelity and low circuit loading (< 1 pF tip capacitance), ± 8 V dynamic range, ± 12 V offset.

Active Voltage/Power Rail Probe



4 GHz bandwidth, ± 30 V offset, ± 800 mV dynamic range. High DC input impedance and low noise/attenuation for power rail probing.

Current Probes



For AC, DC and impulse current measurements. Utilizes combination of Hall effect and transformer technology. Up to 500 A, up to 100 MHz.

Rogowski Coil Probes



Wide frequency range and small sense coils for maximum flexibility. From 300 to 6000 Amps, as low as 0.1 Hz to as high as 30 MHz.

Transmission Line Probes



High-bandwidth passive probe for use with 50 Ω inputs. DC to 7.5 GHz with 0.25 pF input capacitance. 10x or 20x attenuation.

Probe and Current Sensor Adapters



Change between the different Teledyne LeCroy Oscilloscope input types or provide simple interface to 3rd-party probes.

Passive Probes



10x attenuating with 10 M Ω input resistance. Ideal for low-frequency signals.

POWERFUL, DEEP TOOLBOX

Capture		View			Measure		Math		Analyze										Document
Triggering	Acquire	Display Grids	Display Views	Zooming	Parameters	Parameter Analysis	Functions	Advanced Functions	Pass/Fail	Anomaly Detection	Serial Decode	Serial Message Analysis	Clock & Timing Jitter	Serial Data Jitter	Serial Data Analysis	Application Packages	Document		
1 Exclusion	2 Measurement	3 5 MS/s Roll	4 Multistage	5 Sequence Mode	6 Element Key:	7	8	9	10	11	12	13	14	15	16	17-22	23	24	25
26	27	28	29	30	31	32	33	34	35	36	37	38	39	40-45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60	61	62	63-67	68	69	70	71	72	73	74
75	76	77	78	79	80	81	82	83	84	85-89	90	91	92	93	94	95	96	97	98
101	102	103	104	105	106	107-114	115	116	117	118	119	120	121	122	123	124	125	126	127
128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147
148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167
168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187
188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207
208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227
228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247
248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267
268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287
288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307
308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327
328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347
348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367
368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387
388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407
408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427
428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447
448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467
468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487
488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507
508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527
528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547
548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567
568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587
588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607
608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627
628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647
648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667
668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687
688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707
708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727
728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747
748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767
768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787
788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807
808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827
828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847
848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867
868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887
888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907
908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927
928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947
948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967
968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987
988	989	990	991	992	993	994	995	996	997	998	999	1000	1001	1002	1003	1004	1005	1006	1007

Our heritage

Teledyne LeCroy's 50+ year heritage is in processing long records to extract meaningful insight. We invented the digital oscilloscope and many of the additional waveshape analysis tools.

Our obsession


Our tools and operating philosophy are standardized across much of our product line. This deep toolbox inspires insight; and your moment of insight is our reward.

Our invitation

Our Periodic Table of Oscilloscope Tools explains the toolsets that Teledyne LeCroy has deployed in our oscilloscopes. Visit our interactive website to learn more about them.

teledynelecroy.com/tools

MAUI STUDIO - WORKS WHERE YOU ARE

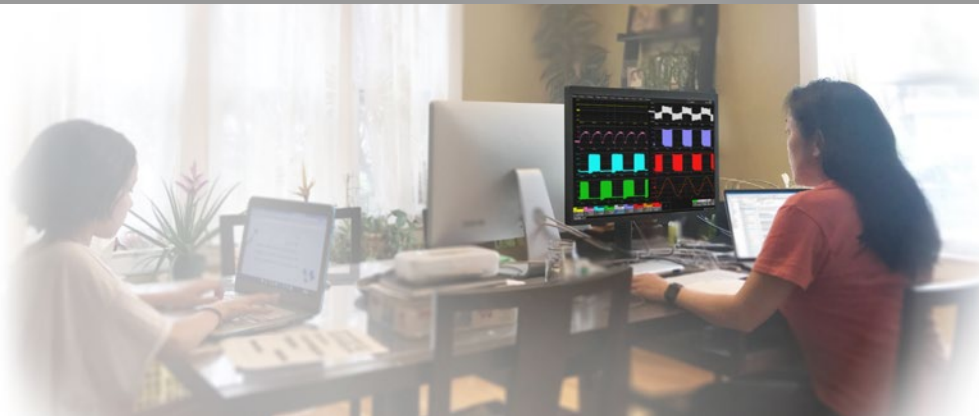

Unleash the power of a Teledyne LeCroy oscilloscope anywhere, using a PC with MAUI Studio Pro. Work remotely from your oscilloscope and collaborate with ease.

Flexibility to Work Anywhere


MAUI Studio provides the flexibility to remotely work anywhere, and allows anyone anywhere to execute real-time analysis by connecting to an oscilloscope through an Ethernet connection or by analyzing a saved LabNotebook.

Collaborate with Ease

Using MAUI Studio, you can share a LabNotebook file saved from an oscilloscope with all of your colleagues, and everyone will have access to the same software options that are found on your oscilloscope.


The Power of MAUI Studio

Get all the unbelievable analytical capabilities of your oscilloscope on your PC. MAUI Studio has all the analysis tools needed to analyze complex waveform data, enabling your lab's oscilloscopes to be freed up for other activities.

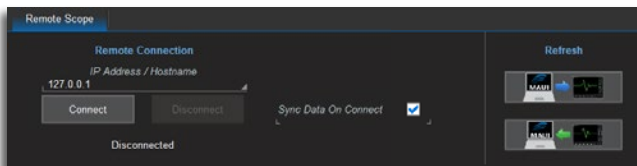


Remote Connection

- Connect to an oscilloscope through an Ethernet connection
- Transfer waveforms and setups from an oscilloscope to MAUI Studio Pro
- Transfer setups from MAUI Studio Pro to an oscilloscope
- Import software options by establishing a remote connection to an oscilloscope

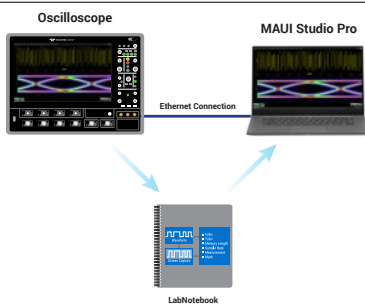

Offline Analysis

- Recall a LabNotebook file to analyze saved waveforms, measurements and setups
- Import software options by recalling a LabNotebook file
- Have access to the same software found on your oscilloscope

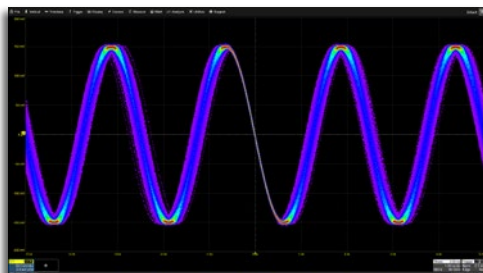

Arbitrary Function Generator

- Generate advance waveforms using the AFG
- Easily generate a PAM4 signal
- Add jitter to a clock signal to simulate real-world signal integrity impairments

Try the free MAUI Studio Pro 30 day trial. Download and register at teledynelecroy.com/mauistudio.

SPECIFICATIONS

WaveMaster 804Zi-B (SDA)

WaveMaster 806Zi-B (SDA)

WaveMaster 808Zi-B (SDA)

Vertical System

Analog Bandwidth @ 50 Ω (-3 dB) (ProLink Input)	4 GHz (≥ 10 mV/div)	6 GHz (≥ 10 mV/div)	8 GHz (≥ 10 mV/div)
Analog Bandwidth @ 50 Ω (-3 dB) (ProBus Input)	3.5 GHz (≥ 10 mV/div)	3.5 GHz (≥ 10 mV/div)	3.5 GHz (≥ 10 mV/div)
Analog Bandwidth @ 1 M Ω (-3 dB) (ProBus Input)	500 MHz (typical, ≥ 2 mV/div)		
Rise Time (10–90%, 50 Ω - test limit)	95 ps (test limit, flatness mode)	63 ps (test limit, flatness mode)	49 ps (test limit, flatness mode)
Rise Time (20–80%, 50 Ω - typical)	71 ps (flatness mode)	47 ps (flatness mode)	37 ps (flatness mode)
Input Channels	4 (Any combination of ProLink and ProBus inputs)		
Vertical Resolution	8 bits; up to 11 bits with enhanced resolution (ERES)		
Effective Number of Bits (ENOB) **	6.5	6.2	6.0
Vertical Noise Floor (rms, typical, 50 Ω)			
1 mV/div	0.21 mV	0.26 mV	0.3 mV
2 mV/div	0.21 mV	0.26 mV	0.3 mV
5 mV/div	0.21 mV	0.26 mV	0.3 mV
10 mV/div	0.21 mV	0.26 mV	0.3 mV
20 mV/div	0.33 mV	0.41 mV	0.47 mV
50 mV/div	0.75 mV	0.93 mV	1.05 mV
100 mV/div	1.47 mV	1.83 mV	2.08 mV
200 mV/div	3.11 mV	3.89 mV	4.48 mV
500 mV/div	7.47 mV	9.32 mV	10.62 mV
1 V/div	15.04 mV	18.66 mV	21.11 mV
** Measured at 50 mV/div, 7 divisions (87.5% full-scale)			
Sensitivity	50 Ω (ProLink): 2 mV–1 V/div, fully variable (2–9.9 mV/div via zoom) 50 Ω (ProBus): 2 mV–1 V/div, fully variable 1 MΩ (ProBus): 2 mV–10 V/div, fully variable		
DC Vertical Gain Accuracy (Gain Component of DC Accuracy)	$\pm 1\%$ F.S. (typical), offset at 0 V; $\pm 1.5\%$ F.S. (test limit), offset at 0 V		
Channel-Channel Isolation	DC to 10 GHz: 50 dB (> 315:1) 10 to 15 GHz: 46 dB (> 200:1) 15 to 20 GHz: 40 dB (> 100:1) (For any two ProLink input channels, same or different V/div settings, typical)		
Offset Range	50 Ω (ProLink): ± 500 mV @ 2 mV/div–100 mV/div ± 4 V @ > 100 mV/div–1 V/div 50 Ω (ProBus): ± 750 mV @ 2 mV/div–100 mV/div ± 4 V @ > 100 mV/div–1 V/div 1 MΩ: ± 1 V @ 2 mV/div–140 mV/div ± 10 V @ 142 mV/div–1.40 V/div ± 100 V @ 1.42 V/div–10 V/div		
DC Vertical Offset Accuracy	$\pm (1.5\%$ of offset setting + 1.5% F.S. + 1 mV) (test limit)		

SPECIFICATIONS

WaveMaster 813Zi-B (SDA)

WaveMaster 816Zi-B (SDA)

WaveMaster 820Zi-B (SDA)

Vertical System

Analog Bandwidth @ 50 Ω (-3 dB) (2.92 mm Input)			
Analog Bandwidth @ 50 Ω (-3 dB) (ProLink Input)	13 GHz (≥ 10 mV/div)	16 GHz (≥ 10 mV/div)	20 GHz (≥ 10 mV/div)
Analog Bandwidth @ 50 Ω (-3 dB) (ProBus Input)	3.5 GHz (≥ 10 mV/div)	3.5 GHz (≥ 10 mV/div)	3.5 GHz (≥ 10 mV/div)
Analog Bandwidth @ 1 MΩ (-3 dB) (ProBus Input)	500 MHz (typical, ≥ 2 mV/div)		
Rise Time (10–90%, 50 Ω - test limit)	32.5 ps (test limit, flatness mode)	28.5 ps (test limit, flatness mode)	22 ps (test limit, flatness mode)
Rise Time (20–80%, 50 Ω - typical)	24.5 ps (flatness mode)	21.5 ps (flatness mode)	16.5 ps (flatness mode)
Input Channels	4 (Any combination of ProLink and ProBus inputs)		
Vertical Resolution	8 bits; up to 11 bits with enhanced resolution (ERES)		
Effective Number of Bits (ENOB) **	5.9	5.7	5.4
Vertical Noise Floor (rms, 50 Ω)			
1 mV/div	0.37 mV	0.43 mV	0.49 mV
2 mV/div	0.37 mV	0.43 mV	0.49 mV
5 mV/div	0.37 mV	0.43 mV	0.49 mV
10 mV/div	0.37 mV	0.43 mV	0.49 mV
20 mV/div	0.56 mV	0.65 mV	0.73 mV
50 mV/div	1.23 mV	1.45 mV	1.57 mV
100 mV/div	2.41 mV	2.86 mV	3.04 mV
200 mV/div	5.35 mV	6.34 mV	7.27 mV
500 mV/div	12.39 mV	14.26 mV	15.41 mV
1 V/div	24.31 mV	28.63 mV	30.26 mV
** Measured at 50 mV/div, 7 divisions (87.5% full-scale)			
Sensitivity	50 Ω (ProLink): 2 mV–1 V/div, fully variable (2–9.9 mV/div via zoom) 50 Ω (ProBus): 2 mV–1 V/div, fully variable 1 MΩ (ProBus): 2 mV–10 V/div, fully variable	50 Ω (ProLink) at 40 GS/s: 2 mV–1 V/div, fully variable (2–9.9 mV/div via zoom) 50 Ω (ProLink) at 80 GS/s: 2 mV–1 V/div, fully variable (2–19.9 mV/div via zoom) 50 Ω (ProBus): 2 mV–1 V/div, fully variable 1 MΩ (ProBus): 2 mV–10 V/div, fully variable	
DC Vertical Gain Accuracy (Gain Component of DC Accuracy)	±1% F.S. (typical), offset at 0 V; ±1.5% F.S. (test limit), offset at 0 V		
Channel-Channel Isolation	DC to 10 GHz: 50 dB (> 315:1) 10 to 15 GHz: 46 dB (> 200:1) 15 to 20 GHz: 40 dB (> 100:1) (For any two ProLink input channels, same or different V/div settings, typical)		
Offset Range	50 Ω (ProLink): ±500 mV @ 2–100 mV/div ±4 V @ > 100 mV/div–1 V/div 50 Ω (ProBus): ±750 mV @ 2–100 mV/div ±4 V @ > 100 mV/div–1 V/div 1 MΩ: ±1 V @ 2–140 mV/div ±10 V @ 142 mV–1.40 V/div ±100 V @ 1.42 V–10 V/div		
DC Vertical Offset Accuracy	±(1.5% of offset setting + 1.5% F.S. + 1 mV) (test limit)		

SPECIFICATIONS

WaveMaster 804Zi-B (SDA)

WaveMaster 806Zi-B (SDA)

WaveMaster 808Zi-B (SDA)

Vertical System

Maximum Input Voltage	50 Ω (ProLink): $\pm 2\text{ V max. @ } \leq 100\text{ mV/div, } 5.5\text{ V}_{\text{rms @ } > 100\text{ mV/div}$ 50 Ω (ProBus): $\pm 5\text{ V max., } 3.5\text{ V}_{\text{rms}}$ 1 MΩ (ProBus): $250\text{ V max. (peak AC: } < 10\text{ kHz + DC)}$		
Input Coupling	ProLink Inputs: 50 Ω: DC, GND ProBus Inputs: $1\text{ MΩ: AC, DC, GND; } 50\text{ Ω: DC, GND}$		
Input Impedance	ProLink Inputs: $50\text{ Ω } \pm 2\% \text{ for } \leq 100\text{ mV/div, } 50\text{ Ω } \pm 3\% \text{ for } > 100\text{ mV/div}$ ProBus Inputs: $50\text{ Ω } \pm 2\% \text{ or } 1\text{ MΩ } \parallel 16\text{ pF, } 1\text{ MΩ } \parallel 11\text{ pF with supplied Probe}$		
Bandwidth Limiters	20 MHz, 200 MHz, 1 GHz	20 MHz, 200 MHz, 1 GHz, 4 GHz	20 MHz, 200 MHz, 1 GHz, 4 GHz, 6 GHz
Rescaling	Length: meters, inches, feet, yards, miles; Mass: grams, slugs; Temperature: celsius, fahrenheit, kelvin; Angle: radian, arcdegr, arcmin, arcsec, cycles, revolutions, turns; Velocity: m/s, in/s, ft/s, yd/s, miles/s; Acceleration: m/s ² , in/s ² , ft/s ² , g0; Volume: liters, cubic meters, cubic inches, cubic feet, cubic yards; Force (Weight): newton, grain, ounce, pound; Pressure: pascal, bar, atmosphere (technical), atmosphere (standard), torr, psi; Electrical: volts, amps, watts, volt-amperes, volt-amperes reactive, farad, coulomb, ohm, siemen, volt/meter, coulomb/m ² , farad/meter, siemen/meter, power factor; Magnetic: weber, tesla, henry, amp/meter, henry/meter; Energy: joule, Btu, calorie; Rotating Machine: radian/second, frequency, revolution/second, revolution/minute, N·m, lb-ft, lb-in, oz-in, watt, horsepower; Other: %.		

Horizontal - Analog Channels

Timebases	Internal timebase common to 4 input channels
Time/Division Range	$20\text{ ps/div} - 128\text{ s/div}$, depending on memory length Real-time Mode: $20\text{ ps/div} - 64\text{ s/div}$ RIS Mode: $20\text{ ps/div} - 10\text{ ns/div}$; user selectable at $\leq 10\text{ ns/div}$ Roll Mode: 100 ms/div up to 128 s/div , user selectable at $\geq 100\text{ ms/div}$ and $\leq 5\text{ MS/s}$
Clock Accuracy	$< 1\text{ ppm} + (\text{aging of } 0.5\text{ ppm/yr from last calibration})$
Sample Clock Jitter	$\text{Up to } 10\text{ }\mu\text{s}$ Acquired Time Range: 100 fsrms (Internal Timebase Reference) $\text{Up to } 6.4\text{ ms}$ Acquired Time Range: 150 fsrms (Internal Timebase Reference)
Delta Time Measurement Accuracy	$\sqrt{2} * \sqrt{\left(\frac{\text{Noise}}{\text{SlewRate}}\right)^2 + (\text{Sample Clock Jitter})^2 (\text{RMS}) + (\text{clock accuracy} * \text{reading}) (\text{seconds})}$
Jitter Measurement Floor	$\sqrt{\left(\frac{\text{Noise}}{\text{SlewRate}}\right)^2 + (\text{Sample Clock Jitter})^2 (\text{RMS, seconds, TIE})}$
Channel-Channel Deskew Range	$\pm 9 \times \text{time/div. setting, or } 25\text{ ns max., each channel}$
External Timebase Reference (Input)	$10\text{ MHz; } 50\text{ Ω impedance, applied at the rear input}$
External Timebase Reference (Output)	$10\text{ MHz; } 50\text{ Ω impedance, output at the rear}$

SPECIFICATIONS

WaveMaster 813Zi-B (SDA)

WaveMaster 816Zi-B (SDA)

WaveMaster 820Zi-B (SDA)

Vertical System

Maximum Input Voltage	50 Ω (ProLink): ±2 V max. @ ≤ 100 mV/div, 5.5 V _{rms} @ > 100 mV/div 50 Ω (ProBus): ±5 V max., 3.5 V _{rms} 1 MΩ (ProBus): 250 V max. (peak AC: < 10 kHz + DC)		
Input Coupling	ProLink Inputs: 50 Ω: DC, GND ProBus Inputs: 1 MΩ: AC, DC, GND; 50 Ω: DC, GND		
Input Impedance	ProLink Inputs: 50 Ω ±2% for ≤ 100 mV/div, 50 Ω ±3% for > 100 mV/div ProBus Inputs: 50 Ω ±2% or 1 MΩ 16 pF, 1 MΩ 11 pF with supplied probe		
Bandwidth Limiters	20 MHz, 200 MHz, 1 GHz, 4 GHz, 6 GHz, 8 GHz	40 GS/s mode: 20 MHz, 200 MHz, 1 GHz, 4 GHz, 6 GHz, 8 GHz, 13 GHz 80 GS/s Mode: 13 GHz	40 GS/s mode: 20 MHz, 200 MHz, 1 GHz, 4 GHz, 6 GHz, 8 GHz, 13 GHz, 16 GHz 80 GS/s Mode: 13 GHz, 16 GHz
Rescaling	Length: meters, inches, feet, yards, miles; Mass: grams, slugs; Temperature: celsius, fahrenheit, kelvin; Angle: radian, arcdeg, arcmin, arcsec, cycles, revolutions, turns; Velocity: m/s, in/s, ft/s, yd/s, miles/s; Acceleration: m/s ² , in/s ² , ft/s ² , g0; Volume: liters, cubic meters, cubic inches, cubic feet, cubic yards; Force (Weight): newton, grain, ounce, pound; Pressure: pascal, bar, atmosphere (technical), atmosphere (standard), torr, psi; Electrical: volts, amps, watts, volt-amperes, volt-amperes reactive, farad, coulomb, ohm, siemen, volt/meter, coulomb/m ² , farad/meter, siemen/meter, power factor; Magnetic: weber, tesla, henry, amp/meter, henry/meter; Energy: joule, Btu, calorie; Rotating Machine: radian/second, frequency, revolution/second, revolution/minute, N·m, lb-ft, lb-in, oz-in, watt, horsepower; Other: %.		

Horizontal - Analog Channels

Timebases	Internal timebase common to 4 input channels
Time/Division Range	Real-time Mode at 80 GS/s: 20 ps/div–640 μs/div, depending on memory length Other sample rates: 20 ps/div–128 s/div, depending on memory length Real-time Mode: 20 ps/div–64 s/div; RIS Mode: 20 ps/div–10 ns/div; selectable at ≤10 ns/div; Roll Mode: 100 ms/div up to 128 s/div, selectable at ≥ 100 ms/div and ≤ 5 MS/s
Clock Accuracy	< 1 ppm + (aging of 0.5 ppm/yr from last calibration)
Sample Clock Jitter	Up to 10 μs Acquired Time Range: 100 fsrms (Internal Timebase Reference) Up to 6.4 ms Acquired Time Range: 150 fsrms (Internal Timebase Reference)
Delta Time Measurement Accuracy	$\sqrt{2} * \sqrt{\left(\frac{\text{Noise}}{\text{SlewRate}}\right)^2 + (\text{Sample Clock Jitter})^2 \text{ (RMS)} + (\text{clock accuracy} * \text{reading}) \text{ (seconds)}}$
Jitter Measurement Floor	$\sqrt{\left(\frac{\text{Noise}}{\text{SlewRate}}\right)^2 + (\text{Sample Clock Jitter})^2 \text{ (RMS, seconds, TIE)}}$
Channel-Channel Deskew Range	±9 x time/div. setting, or 25 ns max., each channel
External Timebase Reference (Input)	10 MHz; 50 Ω impedance, applied at the rear input
External Timebase Reference (Output)	10 MHz; 50 Ω impedance, output at the rear

SPECIFICATIONS

WaveMaster 804Zi-B (SDA)

WaveMaster 806Zi-B (SDA)

WaveMaster 808Zi-B (SDA)

Acquisition - Analog Channels

Sample Rate (Single-Shot)	40 GS/s (80 GS/s on 2 Ch using optional WM8Zi-2X80GS External Interleaving Device)
Random Interleaved Sampling (RIS)	200 GS/s for repetitive signals (20 ps/div to 10 ns/div)

Standard Memory	WaveMaster: 32 Mpts, 5,000 segments max SDA models: 64 Mpts, 15,000 segments max (Memory and Sample Rate can be doubled in 1 or 2 Ch mode with use of WM8Zi-2X80GS External Interleaving Device)
-----------------	--

Memory Options

Option	Mem/Ch	Max Segments
M-64	64 Mpts	15,000
L-128	128 Mpts	15,000
VL-256	256 Mpts	15,000

(Memory and Sample Rate can be doubled in 1 or 2 Ch mode with use of WM8Zi-2X80GS External Interleaving Device)

Intersegment time	1 μ s
Averaging	Summed averaging to 1 million sweeps; continuous averaging to 1 million sweeps
Interpolation	Linear or Sin x/x

Vertical, Horizontal, Acquisition - Digital Channels with HDA125-18-LBUS

Maximum Input Frequency	3 GHz
Minimum Detectable Pulse Width	167ps
Input Dynamic Range	± 10 V on any single ended input ± 7.5 V max differential
Input Impedance (Flying Leads)	QL-SI tips: 110 k Ω , 0.12pF differential
Input Channels	18 Digital Channels
Maximum Input Voltage	± 15 V on any single ended input ± 15 V max differential
Minimum Input Voltage Swing	150 mV p-p
Threshold Selections	User defined
Threshold Accuracy	$\pm (25\text{mV} + 3\% \text{ of threshold setting})$
User Defined Threshold Range	± 5 V, settable per channel in 5 mV steps
User Defined Hysteresis Range	50mV - 600mV settable per channel
Sample Rate	12.5 GS/s
Channel-to-Channel Skew	± 160 ps
Deskew Range	± 1.6 ns in 80ps steps

SPECIFICATIONS

WaveMaster 813Zi-B (SDA)		WaveMaster 816Zi-B (SDA)	WaveMaster 820Zi-B (SDA)
Acquisition - Analog Channels			
Sample Rate (Single-Shot)	40 GS/s (80 GS/s on 2 Ch using optional WM8Zi-2X80GS External Interleaving Device)	40 GS/s on 4 Ch 80 GS/s on 2 Ch	
Random Interleaved Sampling (RIS)	200 GS/s for repetitive signals (20 ps/div to 10 ns/div)		
Standard Memory	WaveMaster: 32 Mpts, 5,000 segments max SDA models: 64 Mpts, 15,000 segments max (Memory and Sample Rate can be doubled in 1 or 2 Ch mode with use of WM8Zi-2X80GS External Interleaving Device)	4 channels: 32 Mpts, 5,000 segments max (SDA: 64 Mpts, 15,000 segments max) 2 channels: (SDA: 128 Mpts, 15,000 segments max)	
Memory Options			
	Option	Mem/Ch	Max Segments
	M-64	64 Mpts	15,000
	L-128	128 Mpts	15,000
	VL-256	256 Mpts	15,000
Intersegment time	1 μs		
Averaging	Summed averaging to 1 million sweeps; continuous averaging to 1 million sweeps		
Interpolation	Linear or Sin x/x		
Vertical, Horizontal, Acquisition - Digital Channels with HDA125-18-LBUS			
Maximum Input Frequency	3 GHz		
Minimum Detectable Pulse Width	167 ps		
Input Dynamic Range	±10 V on any single ended input ±7.5 V max differential		
Input Impedance (Flying Leads)	QL-SI tips: 110 kΩ, 0.12 pF differential		
Input Channels	18 Digital Channels		
Maximum Input Voltage	±15 V on any single ended input ±15 V max differential		
Minimum Input Voltage Swing	150 mV p-p		
Threshold Selections	User Defined		
Threshold Accuracy	±(25 mV + 3% of threshold setting)		
User Defined Threshold Range	±5 V, settable per channel in 5 mV steps		
User Defined Hysteresis Range	50 mV - 600 mV settable per channel		
Sample Rate	12.5 GS/s		
Channel-to-Channel Skew	±160 ps		
Deskew Range	±1.6 ns in 80 ps steps		

SPECIFICATIONS

WaveMaster 804Zi-B (SDA)

WaveMaster 806Zi-B (SDA)

WaveMaster 808Zi-B (SDA)

Triggering System

Modes	Normal, Auto, Single and Stop		
Sources	Any input channel, Ext, Ext/10, Line, or Fast Edge; slope and level unique to each source (except line trigger)		
Coupling	DC, AC, HFRej, LFRej		
Pre-trigger Delay	0 to 100% of memory size		
Post-trigger Delay	0–10,000 divisions in real time mode, limited at slower time/div settings or in roll mode		
Hold-off	From 2 ns up to 20 s or from 1 to 99,999,999 events		
Trigger and Interpolator Jitter	<0.1 ps rms (typical, software assisted), 2 ps rms (typical, hxc fvdardware)		
Internal Trigger Level Range	±4.1 div from center		
External Trigger Level Range	Ext (±0.4 V); Ext/10 (±4 V)		
Maximum Trigger Rate	1,000,000 waveforms/second (in Sequence Mode, up to 4 channels)		
Trigger Sensitivity with Edge Trigger 2.92mm Inputs	Not Applicable		
Trigger Sensitivity with Edge Trigger (Ch 1–4) ProBus Inputs	2 div @ < 3.5 GHz 1.5 div @ < 1.75 GHz 1.0 div @ < 200 MHz (for DC coupling, ≥ 10 mV/div, 50 Ω)		
Trigger Sensitivity with Edge Trigger (Ch 1–4) ProLink Inputs	2 div @ < 4 GHz, 1.5 div @ < 3 GHz, 1.0 div @ < 200 MHz, (for DC, AC, LFRej coupling, ≥ 10 mV/div, 50 Ω)	2 div @ < 6 GHz 1.5 div @ < 3 GHz 1.0 div @ < 200 MHz (for DC, AC, LFRej coupling, ≥ 10 mV/div, 50 Ω)	2 div @ < 8 GHz 1.5 div @ < 3 GHz 1.0 div @ < 200 MHz (for DC, AC, LFRej coupling, ≥ 10 mV/div, 50 Ω)
External Trigger Sensitivity, (Edge Trigger)	2 div @ < 1 GHz, 1.5 div @ < 500 MHz, 1.0 div @ < 200 MHz, (for DC coupling)		
Max. Trigger Frequency, SMART Trigger	2.0 GHz @ ≥ 10 mV/div (minimum triggerable width 200 ps)		

Trigger Types

Edge	Triggers when signal meets slope (positive, negative, or either) and level condition.
Width	Triggers on positive, negative or both (widths selectable as low as 200ps to 20 s) or on intermittent faults.
Glitch	Triggers on positive or negative glitches (widths selectable as low as 200ps to 20 s) or on intermittent faults.
Window	Triggers when signal exits a window defined by adjustable thresholds.
Pattern	Logic combination (AND, NAND, OR, NOR) of 5 inputs (4 channels and external trigger input). Each source can be high, low or don't care. The high and low level can be selected independently. Triggers at start or end of the pattern.
TV-Composite Video	Triggers NTSC or PAL with selectable line and field; HDTV (720p, 1080i, 1080p) with selectable frame rate (50 or 60 Hz) and line; or CUSTOM with selectable fields (1-8), lines (up to 2000), frame rates (25, 30, 50, or 60 Hz), interlacing (1:1, 2:1, 4:1, 8:1) or synch pulse slope (positive or negative).
Runt	Trigger on positive or negative runts defined by two voltage limits and two time limits. Select between 1 ns and 20 ns.
Slew Rate	Trigger on edge rates. Select limits for dV, dt and slope. Select edge limits between 1 ns and 20 ns.
Interval	Triggers on intervals selectable between 1 ns and 20 s.
Dropout	Triggers if signal drops out for longer than selected time between 1 ns and 20 s.
Exclusion Triggering	Trigger on intermittent faults by specifying the expected behavior and triggering when that condition is not met.
Measurement Trigger	Select from a large number of measurement parameters trigger on a measurement value with qualified limits. Can be used as only trigger or last event in a Cascade Trigger.
Multi-stage: Qualified	Triggers on any input source only if a defined state or edge occurred on another input source. Holdoff between sources is selectable by time or events.
Multi-stage: Qualified First	In Sequence acquisition mode, triggers repeatably on event B only if a defined pattern, state or edge (event A) is satisfied in the first segment of the acquisition. Holdoff between sources is selectable by time or events.

High and Low Speed Serial Protocol Triggering (Optional)

Please refer to the *Oscilloscope Features, Options, and Accessories Catalog* for the latest offerings on all our instruments

Measurement Tools

Measurement Functionality	Display up to 12 measurement parameters together with statistics including mean, minimum, maximum, standard deviation, and total number. Each occurrence of each parameter is measured and added to the statistics table. Histicons provide a fast, dynamic view of parameters and waveshape characteristics. Parameter math allows addition, subtraction, multiplication or division of two different parameters. Parameter gates define the location for measurement on the source waveform. Parameter accept criteria define allowable values based on range setting or waveform state.
Measurement Parameters - Horizontal + Jitter	Cycles (number of), Cycle to Cycle, Delay (from trigger, 50%), Δ Delay (50%), Duty Cycle (50%, @level), Edges (number of, @level), Fall Time (90-10, @levels), Frequency (50%, @level), Half Period (@level), Hold Time (@level), N Cycle Jitter (peak-peak), Number of Points, Period (50%, @level), Δ Period (@level), Phase (@level), Rise Time (10-90, @levels), Setup (@levels), Skew (@levels), Slew Rate (@levels), Time Interval Error (@level), Time (@level), Δ Time (@level), Width (50%, @level), Δ Width (@level), X(value)@max, X(value)@min
Measurement Parameters - Vertical	Amplitude, Base, Level@X, Maximum, Mean, Median, Minimum, Peak-to-Peak, RMS, Std. Deviation, Top
Measurement Parameters - Pulse	Area, Base, Fall Time (90-10, 80-20, @levels), Overshoot (positive, negative), Rise Time (10-90, 80-20, @levels), Top, Width (50%)
Measurement Parameters - Statistical (on Histograms)	Full Width (@ Half Max, @%), Amplitude, Base, Peak@MaxPopulation, Maximum, Mean, Median, Minimum, Mode, Range, RMS, Std. Deviation, Top, X(value)@Peak, Peaks (number of), Percentile, Population (@bin, total)

SPECIFICATIONS

WaveMaster 813Zi-B (SDA)

WaveMaster 816Zi-B (SDA)

WaveMaster 820Zi-B (SDA)

Triggering System

Modes	Normal, Auto, Single and Stop		
Sources	Any input channel, Ext, Ext/10, Line or Fast Edge; slope and level unique to each source (except line trigger)		
Coupling	DC, AC, HFRej, LFRej		
Pre-trigger Delay	0 to 100% of memory size		
Post-trigger Delay	No limitation		
Hold-off	From 1 ns up to 20 s or from 1 to 99,999,999 events		
Trigger and Interpolator Jitter	≤ 2.5 ps RMS (typical), < 0.1 ps RMS (typical, software assisted)		
Internal Trigger Level Range	±4.1 div from center		
External Trigger Level Range	Ext (±0.4 V); Ext/10 (±4 V)		
Maximum Trigger Rate	1,000,000 waveforms/second (in Sequence Mode, up to 4 channels)		
Trigger Sensitivity with Edge Trigger 2.92mm Inputs	Not Applicable		
Trigger Sensitivity with Edge Trigger (Ch 1–4) ProBus Inputs	2 div @ < 3.5 GHz 1.5 div @ < 1.75 GHz 1.0 div @ < 200 MHz (for DC coupling, ≥ 10 mV/div, 50 Ω)		
Trigger Sensitivity with Edge Trigger (Ch 1–4) ProLink Inputs	3 div @ < 13 GHz 1.5 div @ < 3 GHz 1.0 div @ < 200 MHz (for DC, AC, LFRej coupling, ≥ 10 mV/div, 50 Ω)	0.75 div	0.75 div
External Trigger Sensitivity, (Edge Trigger)	2 div @ < 1 GHz, 1.5 div @ < 500 MHz, 1.0 div @ < 200 MHz, (for DC coupling)	2 div @ < 3.5 GHz 1.5 div @ < 1.75 GHz 1.0 div @ < 200 MHz (for DC coupling, ≥ 10 mV/div, 50 Ω)	
Max. Trigger Frequency, SMART Trigger	2.0 GHz @ ≥ 10 mV/div (minimum triggerable width 200 ps)		

Trigger Types

Edge	Triggers when signal meets slope (positive, negative or either) and level condition.
Width	Triggers on positive, negative or both widths (widths selectable as low as 200 ps to 20 s) or on intermittent faults.
Glitch	Triggers on positive or negative glitches (widths selectable as low as 200 ps to 20 s) or on intermittent faults.
Window	Triggers when signal exits a window defined by adjustable thresholds.
Pattern	Logic combination (AND, NAND, OR, NOR) of 5 inputs (4 channels and external trigger input). Each source can be high, low or don't care. The high and low level can be selected independently. Triggers at start or end of the pattern.
TV-Composite Video	Triggers NTSC or PAL with selectable line and field; HDTV (720p, 1080i, 1080p) with selectable frame rate (50 or 60 Hz) and line; or CUSTOM with selectable fields (1-8), lines (up to 2000), frame rates (25, 30, 50 or 60 Hz), interlacing (1:1, 2:1, 4:1, 8:1) or synch pulse slope (positive or negative).
Runt	Trigger on positive or negative runts defined by two voltage limits and two time limits. Select between 1 ns and 20 ns.
Slew Rate	Trigger on edge rates. Select limits for dV, dt and slope. Select edge limits between 1 ns and 20 ns.
Interval	Triggers on intervals selectable between 1 ns and 20 s.
Dropout	Triggers if signal drops out for longer than selected time between 1 ns and 20 s.
Exclusion Triggering	Trigger on intermittent faults by specifying the expected behavior and triggering when that condition is not met.
Measurement Trigger	Select from a large number of measurement parameters trigger on a measurement value with qualified limits. Can be used as only trigger or last event in a Cascade Trigger.
Multi-stage: Qualified	Triggers on any input source only if a defined state or edge occurred on another input source. Holdoff between sources is selectable by time or events.
Multi-stage: Qualified First	In Sequence acquisition mode, triggers repeatably on event B only if a defined pattern, state or edge (event A) is satisfied in the first segment of the acquisition. Holdoff between sources is selectable by time or events.

High- and Low-speed Serial Protocol Triggering (Optional)

Please refer to the *Oscilloscope Features, Options and Accessories Catalog* for the latest offerings on all our instruments.

Measurement Tools

Measurement Functionality	Display up to 12 measurement parameters together with statistics including mean, minimum, maximum, standard deviation and total number. Each occurrence of each parameter is measured and added to the statistics table. Histograms provide a fast, dynamic view of parameters and waveshape characteristics. Parameter math allows addition, subtraction, multiplication or division of two different parameters. Parameter gates define the location for measurement on the source waveform. Parameter accept criteria define allowable values based on range setting or waveform state.
Measurement Parameters - Horizontal + Jitter	Cycles (number of), Cycle to Cycle, Delay (from trigger, 50%), Δ Delay (50%), Duty Cycle (50%, @level), Edges (number of, @level), Fall Time (90-10, @levels), Frequency (50%, @level), Half Period (@level), Hold Time (@level), N Cycle Jitter (peak-peak), Number of Points, Period (50%, @level), Δ Period (@level), Phase (@level), Rise Time (10-90, @levels), Setup (@levels), Skew (@levels), Slew Rate (@levels), Time Interval Error (@level), Time (@level), Δ Time (@level), Width (50%, @level), Δ Width (@level), X(value)@max, X(value)@min
Measurement Parameters - Vertical	Amplitude, Base, Level@X, Maximum, Mean, Median, Minimum, Peak-to-Peak, RMS, Std. Deviation, Top
Measurement Parameters - Pulse	Area, Base, Fall Time (90-10, 80-20, @levels), Overshoot (positive, negative), Rise Time (10-90, 80-20, @levels), Top, Width (50%)
Measurement Parameters - Statistical (on Histograms)	Full Width (@ Half Max, @%), Amplitude, Base, Peak@MaxPopulation, Maximum, Mean, Median, Minimum, Mode, Range, RMS, Std. Deviation, Top, X(value)@Peak, Peaks (number of), Percentile, Population (@bin, total)

SPECIFICATIONS

WaveMaster 804Zi-B (SDA)

WaveMaster 806Zi-B (SDA)

WaveMaster 808Zi-B (SDA)

Math Tools

Math Functionality	Display up to 12 math functions traces (F1-F12). The easy-to-use graphical interface simplifies setup of up to two operations on each function trace, and function traces can be chained together to perform math-on-math.
Math Operators - Basic Math	Average (summed), Average (continuous), Difference (–), Envelope, Floor, Invert (negate), Product (x), Ratio (/), Reciprocal, Rescale (with units), Roof, Sum (+)
Math Operators - Digital (incl. with MSO models/options)	Digital AND, Digital DFlipFlop, Digital NAND, Digital NOR, Digital NOT, Digital OR, Digital XOR
Math Operators - Filters	Enhanced resolution (to 15 bits vertical), Interpolate (cubic, quadratic, sinx/x)
Math Operators - Frequency Analysis	FFT (power spectrum, magnitude, phase, power density, real, imaginary, magnitude squared) up to full analysis memory length. Select from Rectangular, VonHann, Hamming, FlatTop and Blackman Harris windows.
Math Operators - Functions	Absolute value, Correlation (two waveforms), Derivative, Deskew (resample), Exp (base e), Exp (base 10), Integral, Invert (negate), Log (base e), Log (base 10), Reciprocal, Rescale (with units), Square, Square root, Zoom (identity)
Math Operators - Other	Segment, Sparse

Measurement and Math Integration

Histograms to display statistical distributions of up to 2 billion measurement parameters. Trend (datalog) of up to 1 million measurement parameters. Track (display parameter vs. time, time-correlated to acquisitions) any parameter. Persistence histogram and persistence trace (mean, range, sigma).

Pass/Fail Testing

Display up to 12 Pass/Fail queries using a Single or Dual Parameter Comparison (compare All values, or Any value <, ≤, =, >, ≥, within limit ±Δ value or %) or Mask Test (pre-defined or user-defined mask, waveform All In, All Out, Any In, or Any Out conditions). Combine queries into a boolean expression to Pass or Fail IF "All True", "All False", "Any True", "Any False", or groups of "All" or "Any", with following THEN Save (waveforms), Stop, Alarm, (send) Pulse, Hardcopy (send email, save screen image, save to clipboard, send to printer), or (save) LabNotebook.

Display System

Size	Color 15.3" flat panel TFT-Active Matrix LCD with high-resolution touch screen
Resolution	WXGA; 1280 x 768 pixels
Number of Traces	Display a maximum of 16 traces (up to 40 with some software options). Simultaneously display channel, zoom, memory and math traces.
Grid Styles	Auto, Single, Dual, Quad, Octal, X-Y, Single+X-Y, Dual+X-Y
Waveform Representation	Sample dots joined, or sample dots only

Processor/CPU

Type	Intel® Core™ i7-4770S Quad, 3.1 GHz (up to 3.9 GHz in Turbo mode) or better
Processor Memory	16 GB standard for STD memory (32 Mpt) and M-64 memory options 32 GB standard for L-128 and VL-256 memory options
Operating System	Microsoft Windows® 10
Real-Time Clock	Date and time displayed with waveform in hardcopy files. SNTP support to synchronize to precision internal clocks.

Connectivity

Ethernet Port	Supports 10/100/1000BaseT Ethernet interface (RJ45 port)
USB Host Ports	4 rear USB 3.0 ports, 3 front panel USB 2.0 ports support Windows-compatible devices
GPIO Port (Optional)	Supports IEEE-488.2
External Monitor Port	Full-size DisplayPort connector, includes support for extended desktop operation with second monitor
Remote Control	Via Microsoft COM Automation or via LeCroy Remote Command Set
Network Communication Standard	VXI-11 or VICP, LXI Class C (v1.2) compliant

Power Requirements

Voltage	100–240 VAC ±10% at 45-66 Hz; 100-120 VAC ±10% at 380-420 Hz; automatic AC voltage selection, Installation Category II
Max Power Consumption	975 W / 975 VA

Environmental

Temperature (Operating)	+5 °C to +40 °C
Temperature (Non-Operating)	–20 °C to +60 °C
Humidity (Operating)	5% to 90% RH (non-condensing) up to +31 °C, upper limit derating to 50% RH (non-condensing) at +40 °C
Humidity (Non-Operating)	5% to 95% RH (non-condensing) as tested per MIL-PRF-28800F
Altitude (Operating)	Up to 10,000 ft (3048 m) at or below +30 °C
Altitude (Non-Operating)	Up to 40,000 ft (12,192 m)
Random Vibration (Operating)	0.5 grms 5 Hz to 500 Hz, 15 minutes in each of three orthogonal axes
Random Vibration (Non-Operating)	2.4 grms 5 Hz to 500 Hz, 15 minutes in each of three orthogonal axes
Functional Shock	20 g peak, half sine, 11 ms pulse, 3 shocks (positive and negative) in each of three orthogonal axes, 18 shocks total

Size and Weight

Dimensions (HWD)	14" H x 18.4" W x 16" D (355 x 467 x 406 mm)
Weight	51.5 lbs. (23.4 kg)

Certifications

CE Certification	CE compliant, UL and cUL listed; conforms to EN 61326, EN 61010-1, EN61010-2-030, UL 61010-1 3rd edition and CSA C22.2 No. 61010-1-12
UL and cUL Listing	

Warranty and Service

3-year warranty; calibration recommended annually. Optional service programs include extended warranty, upgrades and calibration services.

SPECIFICATIONS

WaveMaster 813Zi-B (SDA)

WaveMaster 816Zi-B (SDA)

WaveMaster 820Zi-B (SDA)

Math Tools

Math Functionality	Display up to 12 math functions traces (F1-F12). The easy-to-use graphical interface simplifies setup of up to two operations on each function trace, and function traces can be chained together to perform math-on-math.
Math Operators - Basic Math	Average (summed), Average (continuous), Difference (–), Envelope, Floor, Invert (negate), Product (x), Ratio (/), Reciprocal, Rescale (with units), Roof, Sum (+)
Math Operators - Digital (incl. with MSO models/options)	Digital AND, Digital DFlipFlop, Digital NAND, Digital NOR, Digital NOT, Digital OR, Digital XOR
Math Operators - Filters	Enhanced resolution (to 15 bits vertical), Interpolate (cubic, quadratic, sinx/x)
Math Operators - Frequency Analysis	FFT (power spectrum, magnitude, phase, power density, real, imaginary, magnitude squared) up to full analysis memory length. Select from Rectangular, VonHann, Hamming, FlatTop and Blackman Harris windows.
Math Operators - Functions	Absolute value, Correlation (two waveforms), Derivative, Deskew (resample), Exp (base e), Exp (base 10), Integral, Invert (negate), Log (base e), Log (base 10), Reciprocal, Rescale (with units), Square, Square root, Zoom (identity)
Math Operators - Other	Segment, Sparse

Measurement and Math Integration

Histograms to display statistical distributions of up to 2 billion measurement parameters. Trend (datalog) of up to 1 million measurement parameters. Track (display parameter vs. time, time-correlated to acquisitions) any parameter. Persistence histogram and persistence trace (mean, range, sigma).

Pass/Fail Testing

Display up to 12 Pass/Fail queries using a Single or Dual Parameter Comparison (compare All values, or Any value <, ≤, =, >, ≥, within limit ±Δ value or %) or Mask Test (pre-defined or user-defined mask, waveform All In, All Out, Any In, or Any Out conditions). Combine queries into a boolean expression to Pass or Fail IF "All True", "All False", "Any True", "Any False", or groups of "All" or "Any", with following THEN Save (waveforms), Stop, Alarm, (send) Pulse, Hardcopy (send email, save screen image, save to clipboard, send to printer) or (save) LabNotebook.

Display System

Size	Color 15.3" flat panel TFT-Active Matrix LCD with high-resolution touch screen
Resolution	WXGA; 1280 x 768 pixels
Number of Traces	Display a maximum of 16 traces (up to 40 with some software options). Simultaneously display channel, zoom, memory and math traces.
Grid Styles	Auto, Single, Dual, Quad, Octal, X-Y, Single+X-Y, Dual+X-Y
Waveform Representation	Sample dots joined, or sample dots only

Processor/CPU

Type	Intel® Core™ i7-4770S Quad, 3.1 GHz (up to 3.9 GHz in Turbo mode), or better
Processor Memory	16 GB standard for STD memory (32 Mpt) and M-64 memory options 32 GB standard for L-128 and VL-256 memory options
Operating System	Microsoft Windows® 10
Real-Time Clock	Date and time displayed with waveform in hardcopy files. SNTP support to synchronize to precision internal clocks.

Connectivity

Ethernet Port	Supports 10/100/1000BaseT Ethernet interface (RJ45 port)
USB Host Ports	4 rear USB 3.0 ports, 3 front panel USB 2.0 ports support Windows-compatible devices
GPIO Port (Optional)	Supports IEEE-488.2
External Monitor Port	Full-size DisplayPort connector, includes support for extended desktop operation with second monitor
Remote Control	Via Microsoft COM Automation, or via LeCroy Remote Command Set
Network Communication Standard	VXI-11 or VICP, LXI Class C (v1.2) compliant

Power Requirements

Voltage	100–240 VAC ±10% at 45-66 Hz; 100-120 VAC ±10% at 380-420 Hz; automatic AC voltage selection, Installation Category II
Max Power Consumption	975 W / 975 VA

Environmental

Temperature (Operating)	+5 °C to +40 °C
Temperature (Non-Operating)	–20 °C to +60 °C
Humidity (Operating)	5% to 90% RH (non-condensing) up to +31 °C, upper limit derating to 50% RH (non-condensing) at +40 °C
Humidity (Non-Operating)	5% to 95% RH (non-condensing) as tested per MIL-PRF-28800F
Altitude (Operating)	Up to 10,000 ft (3048 m) at or below +30 °C
Altitude (Non-Operating)	Up to 40,000 ft (12,192 m)
Random Vibration (Operating)	0.5 grms 5 Hz to 500 Hz, 15 minutes in each of three orthogonal axes
Random Vibration (Non-Operating)	2.4 grms 5 Hz to 500 Hz, 15 minutes in each of three orthogonal axes
Functional Shock	20 g peak, half sine, 11 ms pulse, 3 shocks (positive and negative) in each of three orthogonal axes, 18 shocks total

Size and Weight

Dimensions (HWD)	14" H x 18.4" W x 16" D (355 x 467 x 406 mm)
Weight	51.5 lbs. (23.4 kg)

Certifications

CE Certification	CE compliant, UL and cUL listed; conforms to EN 61326, EN 61010-1, EN61010-2-030, UL 61010-1 3rd edition and CSA C22.2 No. 61010-1-12
------------------	---

Warranty and Service

3-year warranty; calibration recommended annually. Optional service programs include extended warranty, upgrades and calibration services.

ORDERING INFORMATION

Product Description

Product Code

WaveMaster 8 Zi-B Series Oscilloscopes

4 GHz, 40 GS/s, 4ch, 32 Mpts/Ch WaveMaster with 15.3" WXGA Color Display. 50 Ω and 1 M Ω Inputs	WaveMaster 804Zi-B
6 GHz, 40 GS/s, 4ch, 32 Mpts/Ch WaveMaster with 15.3" WXGA Color Display. 50 Ω and 1 M Ω Inputs	WaveMaster 806Zi-B
8 GHz, 40 GS/s, 4ch, 32 Mpts/Ch WaveMaster with 15.3" WXGA Color Display. 50 Ω and 1 M Ω Inputs	WaveMaster 808Zi-B
13 GHz, 40 GS/s, 4ch, 32 Mpts/Ch WaveMaster with 15.3" WXGA Color Display. 50 Ω and 1 M Ω Inputs	WaveMaster 813Zi-B
16 GHz, 80 GS/s, 64 Mpts/Ch WaveMaster with 15.3" WXGA Color Display. 50 Ω and 1 M Ω Inputs. Also operates in 4ch, 40 GS/s, 32 Mpts/Ch mode.	WaveMaster 816Zi-B
20 GHz, 80 GS/s, 64 Mpts/Ch WaveMaster with 15.3" WXGA Color Display. 50 Ω and 1 M Ω Inputs. Also operates in 4ch, 40 GS/s, 32 Mpts/Ch mode.	WaveMaster 820Zi-B

SDA 8 Zi-B Series Serial Data Analyzers

4 GHz, 40 GS/s, 4ch, 64 Mpts/Ch Serial Data Analyzer with 15.3" WXGA Color Display. 50 Ω and 1 M Ω Inputs, 8b/10b and 64b/66b decode.	SDA 804Zi-B
6 GHz, 40 GS/s, 4ch, 64 Mpts/Ch Serial Data Analyzer with 15.3" WXGA Color Display. 50 Ω and 1 M Ω Inputs, 8b/10b and 64b/66b decode.	SDA 806Zi-B
8 GHz, 40 GS/s, 4ch, 64 Mpts/Ch Serial Data Analyzer with 15.3" WXGA Color Display. 50 Ω and 1 M Ω Inputs, 8b/10b and 64b/66b decode.	SDA 808Zi-B
13 GHz, 40 GS/s, 4ch, 64 Mpts/Ch Serial Data Analyzer with 15.3" WXGA Color Display. 50 Ω and 1 M Ω Inputs, 8b/10b and 64b/66b decode.	SDA 813Zi-B
16 GHz, 80 GS/s, 128 Mpts/Ch Serial Data Analyzer with 15.3" WXGA Color Display. 50 Ω and 1 M Ω Inputs, 8b/10b and 64b/66b decode. Also operates in 4ch, 40 GS/s, 64 Mpts/Ch mode.	SDA 816Zi-B
20 GHz, 80 GS/s, 128 Mpts/Ch Serial Data Analyzer with 15.3" WXGA Color Display. 50 Ω and 1 M Ω Inputs, 8b/10b and 64b/66b decode. Also operates in 4ch, 40 GS/s, 64 Mpts/Ch mode.	SDA 820Zi-B

Included with Standard Configuration

÷10, 500 MHz Passive Probe (Qty. 4 on 4 – 20 GHz units, Qty. 2 on 25 – 45 GHz units)	
ProLink to SMA Adapter: 4 each (for 4 – 8 GHz units)	LPA-SMA-A
ProLink to K/2.92 mm Adapter: 4 each (for 13 – 45 GHz units)	LPA-K-A
Optical 3-button Wheel Mouse, USB 2.0	
Protective Front Cover	
Printed Getting Started Guide	
Anti-virus Software (Trial Version)	
Microsoft Windows® 10 License	
Commercial NIST Traceable Calibration with Certificate	
Power Cable for the Destination Country	
3-year Warranty	

Memory and Sample Rate Options

80 GS/s on 2 Ch Sampling Rate Option for WaveMaster 8 Zi-B (not available for 816Zi-B, 820Zi-B, 825Zi-B or 830Zi-B), includes two separate external interleaving devices with storage case	WM8Zi-2X80GS
64 Mpts/Ch Memory Option for WaveMaster 8 Zi-B, includes 16 GB of RAM	WM8Zi-M-64
128 Mpts/Ch Memory Option for WaveMaster 8 Zi-B, includes 32 GB of RAM	WM8Zi-L-128
128 Mpts/Ch Memory Option for SDA 8 Zi-B, includes 32 GB of RAM	SDA8Zi-L-128
256 Mpts/Ch Memory Option for WaveMaster 8 Zi-B, includes 32 GB of RAM	WM8Zi-VL-256
256 Mpts/Ch Memory Option for SDA 8 Zi-B, includes 32 GB of RAM	SDA8Zi-VL-256

CPU, Computer and Other Hardware Options

16 GB to 32 GB CPU RAM Option	WM8Zi-16-UPG-32GBRAM
(Included with -L and -VL Memory options)	
Additional Removable Solid State Drive	WM8Zi-RSSD-02

Product Description

Product Code

Cross-layer Analysis Software

CrossSync PHY Protocol Analyzer Synchronization Software Option for PCIe	WM8Zi-CROSSSYNC-PHY-PCIE
CrossSync PHY Protocol Analyzer Synchronization Software Option for USB and Thunderbolt	WM8Zi-CROSSSYNC-PHY-USB

Serial Data and CrossTalk Analysis

Single-lane SDA framework, including Eye and Jitter measurements	WM8Zi-SDAIII
Multi-lane SDA LinQ framework, incl. Eye, Jitter, Noise, Crosstalk measurements, Eye Doctor II and VirtualProbe	WM8Zi-SDAIII-CompleteLinQ SDA8Zi-CompleteLinQ
PAMx Serial Data Analysis, Eye, Jitter and Noise Measurements	WM8Zi-SDAIII-PAMx
PAM4 Signal Analysis	WM8Zi-PAM4

Signal Integrity Toolkits

Advanced De-embedding, Emulation and Virtual Probing Toolkit	WM8Zi-VIRTUALPROBE
Signal Integrity Toolkit - Channel & Fixture De-embedding/Emulation, Tx/Rx Equalization	WM8Zi-EYEDRII
Bundle - Eye Doctor II and VirtualProbe Toolkits	WM8Zi-EYEDRII-VP
Cable De-embedding Option	WM8Zi-CBL-DE-EMBED

Modulated Signal Analysis

VectorLinQ – Flexible vector signal analysis for electrical signals (RF and baseband I-Q)	WM8Zi-VECTORLINQ
VectorLinQ – Advanced vector signal analysis, includes OFDM	WM8Zi-VECTORLINQ-ADV
Optical-LinQ – Coherent optical modulation analysis	WM8Zi-OPTICAL-LINQ

High-speed Digital Analyzer Systems

12.5 GS/s High-speed Digital Analyzer with 18 Ch QuickLink leadset and LBUS connection	HDA125-18-LBUS
12.5 GS/s High-speed Digital Analyzer with 9 Ch QuickLink leadset and LBUS connection	HDA125-09-LBUS

Ethernet and DDR Debug Toolkits

100Base-T1 and 1000Base-T1 Debug Toolkit	WM8Zi-AUTO-ENET-TOOLKIT
DDR2 and LPDDR2 Debug Toolkit	WM8Zi-DDR2-TOOLKIT
DDR 2/3 and LPDDR 2/3 Debug Toolkit	WM8Zi-DDR3-TOOLKIT
DDR 2/3/4 and LPDDR 2/3/4/4X Debug Toolkit	WM8Zi-DDR4-TOOLKIT
DDR 2/3/4/5 and LPDDR 2/3/4/4X Debug Toolkit	WM8Zi-DDR5-TOOLKIT

Serial Data Compliance Test Software

QualiPHY Enabled 1000Base-T1 (Automotive Ethernet) Software Option	QPHY-1000BASE-T1
QualiPHY Enabled 100Base-T1 (Automotive Ethernet) Software Option	QPHY-100BASE-T1
QualiPHY Enabled 10Base-T1L (Industrial Ethernet) Compliance Software Option	QPHY-10BASE-T1L
QualiPHY Enabled 10Base-T1S (Automotive Ethernet) Software Option	QPHY-10BASE-T1S
QualiPHY Enabled 10GBase-KR Software Option	QPHY-10GBASE-KR
QualiPHY Enabled 10GBase-T Software Option	QPHY-10GBASE-T
QualiPHY Enabled DDR2 Software Option	QPHY-DDR2
QualiPHY Enabled LPDDR2 Software Option	QPHY-LPDDR2
QualiPHY Enabled DDR3, DDR3L and LPDDR3 Software Option	QPHY-DDR3
QualiPHY Enabled DDR4 and LPDDR4/4X Software Option	QPHY-DDR4
QualiPHY Enabled DisplayPort 1.4 Source Software Option	QPHY-DP14-SOURCE
QualiPHY Enabled Embedded DisplayPort Software Option	QPHY-eDP
QualiPHY Enabled Ethernet 10/100/1000BT Software Option	QPHY-ENET*
QualiPHY Enabled HDMI 2.0/1.4b TMDS Software Option	QPHY-HDMI2
QualiPHY Enabled HDMI 2.1 FRL and TMDS Software Option	QPHY-HDMI21
QualiPHY Enabled LPDDR2 Software Option	QPHY-LPDDR2

ORDERING INFORMATION

Product Description

Product Code

Serial Data Compliance Test Software (cont'd)

QualiPHY Enabled MIPI C-PHY Software Option	QPHY-MIPI-CPHY
QualiPHY Enabled MIPI D-PHY Software Option	QPHY-MIPI-DPHY
QualiPHY Enabled MIPI M-PHY Software Option	QPHY-MIPI-MPHY
QualiPHY Enabled MOST50 ePHY Software Option	QPHY-MOST50
QualiPHY Enabled MOST150 oPHY Software Option	QPHY-MOST150
QualiPHY Enabled MultiGBase-T1 (Automotive Ethernet) Compliance Software Option	QPHY-MultiGBase-T1
QualiPHY Enabled PCIe 1.0/2.0 Software Option	QPHY-PCIE
QualiPHY Enabled PCIe 3.0 Tx/Rx Software Option	QPHY-PCIE3-TX-RX
QualiPHY Enabled SATA Software Option	QPHY-SATA-TSG-RSG
QualiPHY Enabled SAS-2 Software Option	QPHY-SAS2
QualiPHY Enabled SAS-3 Software Option	QPHY-SAS3
QualiPHY Enabled SFI Software Option	QPHY-SFI
QualiPHY Enabled USB 2.0 Software Option	QPHY-USB†
QualiPHY Enabled USB 3.2 Tx-Rx Software Option	QPHY-USB3.2-TX-RX
*TF-ENET-B required. †TF-HDMI-3.3V-QUADPAK required. ‡TF-USB-B required. PCI Express, SuperSpeed USB (USB 3.0) and SATA Complete Hardware/Software Test Solutions are available. Consult Factory.	

Serial Data Test Fixtures

Test Fixture for 10GBase-T	TF-10GBASE-T
USB4 Sideband Test Coupon Fixture	TF-USB-C-SB
USB4 High-speed and Sideband Test Coupon Fixture	TF-USB-C-HS
Automotive Ethernet Breakout Test Fixture for 100Base-T1 and 1000Base-T1 Debug	TF-AUTO-ENET
4 Pack of SMA Connector Boards for TF-AUTO-ENET	TF-AUTO-ENET-SMA
10/100/1000Base-T Ethernet Test Fixture	TF-ENET-B*
HDMI Pull-Up Terminator Quad Pack	TF-HDMI-3.3V-QUADPAK
SATA 1.5 Gb/s, 3.0 Gb/s and 6.0 Gb/s Compliance Test Fixture Measure Kit	TF-SATA-C-KIT
USB 2.0 Compliance Test Fixture	TF-USB-B
USB 3.0 and 3.1 Compliance Test Fixture	TF-USB3
Electrical Telecom Pulse Mask Test Package	WM8Zi-ET-PMT
MIPI M-PHY input offset adapter dual pack	TF-MIPI-MPHY-DUALPAK
External USB 2.0 to GPIB IEEE 488.2 adapter	USB2-GPIB
*Includes ENET-2CAB-SMA018 and ENET-2ADA-BNCSMA	

Serial Data Triggers and Decoders

100Base-T1 Trigger and Decode Option	WM8Zi-100Base-T1bus TD
100Base-T1 Trigger, Decode, Measure/Graph, and Eye Diagram Option	WM8Zi-100Base-T1bus TDME
10Base-T1S Trigger, Decode, Measure/Graph, and Eye Diagram Option	WM8Zi-10BASE-T1S TDME
10Base-T1S Trigger and Decode Option	WM8Zi-10BASE-T1S TD
MIL-STD-1553 Trigger and Decode Option	WM8Zi-1553 TD
MIL-STD-1553 Trigger, Decode, Measure/Graph, and Eye Diagram Option	WM8Zi-1553 TDME
64b/66b Decode Option	WM8Zi-64b66b D
80-bit NRZ, 8b/10b and 64b/66b 14.1 Gbps Serial Trigger Option, includes 8b/10b and 64b/66b Decode Options	WM8Zi-14GBIT-80B-SYMBOL-TD
80-bit NRZ, 8b/10b, and 64b/66b 6.5 Gbps Serial Trigger Option, includes 8b/10b and 64b/66b Decode Options (Standard on SDA 8 Zi-B)	WM8Zi-6GBIT-80B-SYMBOL-TD
8b10b Decode Option	WM8Zi-8B10B D
ARINC 429 Bus Symbolic Decode, Measure/Graph, Eye Diagram Option	WM8Zi-ARINC429BUS DME SYMBOLIC
ARINC 429 Bus Symbolic Decode Option	WM8Zi-ARINC429bus DSymbolic
Trigger and Decode Option for I2S, LJ, RJ, and TDM	WM8Zi-AUDIOBUS TD
Trigger, Decode and Graph Option for I2S, LJ, RJ, and TDM	WM8Zi-AUDIOBUS TDG
CAN FD Trigger and Decode Option	WM8Zi-CAN FDbus TD
CAN FD Trigger, Decode, Measure/Graph and Eye Diagram Option	WM8Zi-CAN FDBUS TDME
CAN FD Symbolic Trigger, Decode, Measure/Graph, Eye Diagram Option	WM8Zi-CAN FDBUS TDME SYMBOLIC
CAN Trigger and Decode Option	WM8Zi-CANbus TD
CAN Symbolic Trigger, Decode, Measure/Graph and Eye Diagram Option	WM8Zi-CANBUS TDME SYMBOLIC

Product Description

Product Code

Serial Data Triggers and Decoders (cont'd)

C-PHY (DSI-2/CSI-2) Decode Option	WM8Zi-CPHYBUS D
C-PHY (DSI-2/CSI-2) Decode, Measure/Graph and Physical Layer Test Option	WM8Zi-CPHYBUS DMP
DigRF 3G Decode Option	WM8Zi-DigRF3Gbus D
DigRF v4 Decode Option	WM8Zi-DigRFV4bus D
DisplayPort AUX Decode Option	WM8Zi-DPAUX D
DisplayPort AUX Decode, Measure/Graph, and Physical Layer Test Option	WM8Zi-DPAUX DMP
MIPI D-PHY Decode Option	WM8Zi-DPHYbus D
MIPI D-PHY Decode and Physical Layer Test Option	WM8Zi-DPHYbus DP
I ² C, SPI, UART-RS232 Trigger and Decode Bundle	WM8Zi-EMB TD
I ² C, SPI, UART-RS232 Trigger, Decode, Measure/Graph and Eye Diagram Bundle	WM8Zi-EMB TDME
Ethernet 10G Decode Option	WM8Zi-ENET10Gbus D
ENET Decode Option	WM8Zi-ENETbus D
Fibre Channel Decode Option	WM8Zi-FCbus D
FlexRay Trigger and Decode Option	WM8Zi-FlexRayBus TD
FlexRay Trigger, Decode, Measure/Graph and Physical Layer Option	WM8Zi-FLEXRAYBUS TDMP
I ² C Bus Trigger and Decode Option	WM8Zi-I2Cbus TD
I ² C Trigger, Decode, Measure/Graph, and Eye Diagram Option	WM8Zi-I2CBUS TDME
I3C Decode Option	WM8Zi-I3CBUS D
I3C Decode, Measure/Graph and Eye Diagram Option	WM8Zi-I3CBUS DME
LIN Trigger and Decode Option	WM8Zi-LINbus TD
LIN Trigger, Decode, Measure/Graph and Eye Diagram Option	WM8Zi-LINBUS TDME
Manchester Decode Option	WM8Zi-Manchesterbus D
MDIO Decode	WM8Zi-MDIObus D
MIPI M-PHY Decode Option	WM8Zi-MPHYbus D
MIPI M-PHY Decode and Physical Layer Test Option	WM8Zi-MPHYbus DP
MS-500-36 with I2C, SPI, UART-RS-232 Trigger, Decode, Measure/Graph and Eye Diagram Bundle	WM8Zi-MSO-EMB TDME
PCI Express Decode Option	WM8Zi-PCIEbus D
Decoder-Protocol Analyzer Synchronization Software Option	WM8Zi-ProtoSync
Decoder-Protocol Analyzer Synchronization with Bit Tracer Software Option	WM8Zi-ProtoSync-BT
SAS Decode Annotation Option	WM8Zi-SASbus D
SATA Decode Annotation Option	WM8Zi-SATABus D
SENT Decode Option	WM8Zi-SENTbus D
SpaceWire Decode Option	WM8Zi-SpaceWirebus D
SPI Trigger and Decode Option†	WM8Zi-SPIbus TD
SPI Trigger, Decode, Measure/Graph, and Eye Diagram Option	WM8Zi-SPIBUS TDME
SPMI Decode Option	WM8Zi-SPMibusb D
UART and RS-232 Trigger and Decode Option	WM8Zi-UART-RS232bus TD
UART-RS232 Trigger, Decode, Measure/Graph and Eye Diagram Option	WM8Zi-UART-RS232BUS TDME
MIPI UniPro Protocol Decoder	WM8Zi-UNIPRObus D
USB-PD Trigger and Decode Option	WM8Zi-USBPD TD
USB-PD Trigger, Decode, Measure/Graph and Physical Layer Test Option	WM8Zi-USBPD TDMP
USB2-HSIC Decode Option	WM8Zi-USB2-HSICbus D
USB4-SB Trigger and Decode Option	WM8Zi-USB4SB TD
USB4 Decode, Measure/Graph, and Eye Measurements Option	WM8Zi-USB4BUS DME
USB4-SB Trigger, Decode, Measure/Graph, and PHY Meas. Option	WM8Zi-USB4SB TDMP
USB 2.0 Decode Option	WM8Zi-USB2bus D
USB 2.0 Decode, Measure/Graph and Eye Diagram Option	WM8Zi-USB2BUS DME
USB 3.2 Decode Option	WM8Zi-USB32BUS D

Mixed Signal Testing Options

250 MHz, 1 GS/s, 36 Ch, 25 Mpts/Ch (500 MHz, 18 Ch, 2 GS/s, 50 Mpts/Ch Interleaved) Mixed Signal Oscilloscope Option	MS-500-36
--	-----------

ORDERING INFORMATION

Product Description

Product Code

General Purpose and Application Specific Software Options

Spectrum Analyzer for WaveMaster 8 Zi (1 trace)	WM8ZI-SPECTRUM-1
Spectrum Analyzer for WaveMaster/SDA 8 Zi (2 traces + reference trace)	WM8ZI-SPECTRUM-PRO-2
MAUI Studio Pro Software	MAUI-STUDIO-PRO
Coherent Optical Analysis Software	WM8ZI-OPTICAL-LINQ
Digital Filter Software Package	WM8ZI-DFFP2
Serial Data Mask Software Package	WM8ZI-SDM
Disk Drive Measurements Software Package	WM8ZI-DDM2
Disk Drive Analyzer Software Package	WM8ZI-DDA
Advanced Optical Recording Measurement Package	WM8ZI-AORM
Electrical Telecom Mask Test Software Package	WM8ZI-ET-PMT
EMC Pulse Parameter Software Package	WM8ZI-EMC
Power Analysis Option	WM8ZI-PWR
Clock Jitter Analysis with Four Views Software Package	WM8ZI-JITKIT

General Accessories

Soft Carrying Case	WM8ZI-SOFTCASE
Rackmount Accessory for WM8Zi	WM8ZI-RACKMOUNT
ProLink to SMA Adapter	LPA-SMA-A
ProLink to 2.92mm Adapter with Probe Power and Communication Pass Through	LPA-2.92
ProLink to K/2.92 mm Adapter	LPA-K-A

Probes and Probe Accessories

High Voltage Fiber Optic Probe, 150 MHz Bandwidth	HVFO108
Power/Voltage Rail Probe, 2 GHz bandwidth, 1.2x attenuation, +/-60V offset, +/-800mV	RP2060
Power/Voltage Rail Probe, 4 GHz bandwidth, 1.2x attenuation, +/-60V offset, +/-800mV	RP4060
500 MHz 60 V Common Mode Differential Probe	DL05-HCM
1 GHz 60 V Common Mode Differential Probe	DL10-HCM
1.0 GHz, 0.9 pF, 1 MΩ High Impedance Active Probe	ZS1000
1.5 GHz, 0.9 pF, 1 MΩ High Impedance Active Probe	ZS1500
2.5 GHz, 0.9 pF, 1 MΩ High Impedance Active Probe	ZS2500
4.0 GHz, 0.6 pF, 1 MΩ High Impedance Active Probe	ZS4000
400 MHz, 1kV Vrms High-Voltage Passive Probe	HVP120
6kV High Voltage Passive Probe, 500 MHz	PPE6KV-A
25 MHz High Voltage Differential Probe	HVD3102A
1 kV, 25 MHz High Voltage Differential Probe (without tip accessories)	HVD3102A-NOACC
120 MHz High Voltage Differential Probe	HVD3106A
1 kV, 120 MHz High Voltage Differential Probe (without tip accessories)	HVD3106A-NOACC
80 MHz, High Voltage Differential Probe with 6 m Cable	HVD3106A-6M
2 kV, 120 MHz High Voltage Differential Probe	HVD3206A
2 kV, 80 MHz High Voltage Differential Probe with 6 m Cable	HVD3206A-6M
2 kV, 400 MHz High Voltage Differential Probe	HVD3220
6 kV, 100 MHz High Voltage Differential Probe	HVD3605A
700 V, 25 MHz High-Voltage Differential Probe	AP031
500 MHz Differential Probe	AP033
500 MHz, 1.0 pF Active Differential Probe, ±8 V	ZD500
1 GHz, 1.0 pF Active Differential Probe, ±8 V	ZD1000
1.5 GHz, 1.0 pF Active Differential Probe, ±8 V	ZD1500
4 GHz ProBus2 Differential Probe w/ Dx10-SI, Dx10-QC, Dx10-SP	D410-A-PB2
4 GHz ProBus2 Differential Probe w/ Dx20-SI, Dx20-QC, Dx20-SP	D420-A-PB2
6 GHz ProBus2 Differential Probe w/ Dx10-SI, Dx10-QC, Dx10-SP	D610-A-PL
6 GHz ProBus2 Differential Probe w/ Dx20-SI, Dx20-QC, Dx20-SP	D620-A-PL
4 GHz ProBus2 Differential Probe with Adjustable Tip	D400A-AT-PB2
6 GHz ProLink Differential Probe with Adjustable Tip	D600A-AT-PL

Product Description

Product Code

Probes and Probe Accessories (cont'd)

500 MHz 60 V Common Mode Differential Probe.	DH08-PL
13 GHz differential probe with ProLink interface	DH13-PL
16 GHz differential probe with ProLink interface	DH16-PL
20 GHz differential probe with ProLink interface	DH20-PL
Programmable Current Sensor to ProBus Adapter (for use with third party current sensors)	CA10
30 A, 50 MHz Current Probe - AC/DC, 30 A rms, 50 A Peak Pulse, 1.5 meter cable	CP030
30 A, 10 MHz Current Probe - AC/DC, 30 A rms, 50 A Peak Pulse, 3 meter cable	CP030-3M
30 A, 50 MHz High Sensitivity Current Probe - AC/DC, 30 A rms, 50 A Peak Pulse, 1.5 meter cable	CP030A
30A, 100 MHz Current Probe - AC/DC, 30 A rms, 50 A Peak Pulse, 1.5 meter cable	CP031
30 A, 100 MHz High Sensitivity Current Probe - AC/DC, 30 A rms, 50 A Peak Pulse, 1.5 meter cable	CP031A
150 A, 10 MHz Current Probe - AC/DC, 150 A rms, 500 A Peak Pulse, 2 meter cable	CP150
150 A, 5 MHz Current Probe - AC/DC, 150 A rms, 500 A Peak Pulse, 6 meter cable	CP150-6M
500 A, 2 MHz Current Probe - AC/DC, 500 A rms, 700 A Peak Pulse, 6 meter cable	CP500
7.5 GHz Low Capacitance Passive Probe (±10, 1 kΩ; ±20, 500 Ω)	PP066
500 MHz Passive Probe, 2.5mm	PP021-1
500 MHz Passive Probe, 5mm	PP025-1
TekProbe to ProBus Probe Adapter	TPA10

* For a complete probe, order a WL-PLink-CASE Platform/Cable Assembly with the Adjustable Tip Module.

† For a complete probe, order a WL-PBUS-CASE Platform/Cable Assembly with the Adjustable Tip Module

A variety of other active voltage and current probes are also available. Consult Teledyne LeCroy for more information.

Customer Service

Teledyne LeCroy oscilloscopes and probes are designed, built and tested to ensure high reliability. In the unlikely event you experience difficulties, our digital oscilloscopes are fully warranted for three years and our probes are warranted for one year. This warranty includes:

- No charge for return shipping
- Long-term 7-year support
- Upgrade to latest software at no charge



1-800-5-LeCroy
teledynelecroy.com

Local sales offices are located throughout the world.
Visit our website to find the most convenient location.

© 2023 by Teledyne LeCroy, Inc. All rights reserved. Specifications, prices, availability, and delivery subject to change without notice.

PCI Express® is a registered trademark and/or service mark of PCI-SIG. USB4® and USB Type-C® are registered trademarks and/or service marks of USB-IF. MATLAB® is a registered trademark of The MathWorks, Inc. All other product or brand names are trademarks or requested trademarks of their respective holders.